
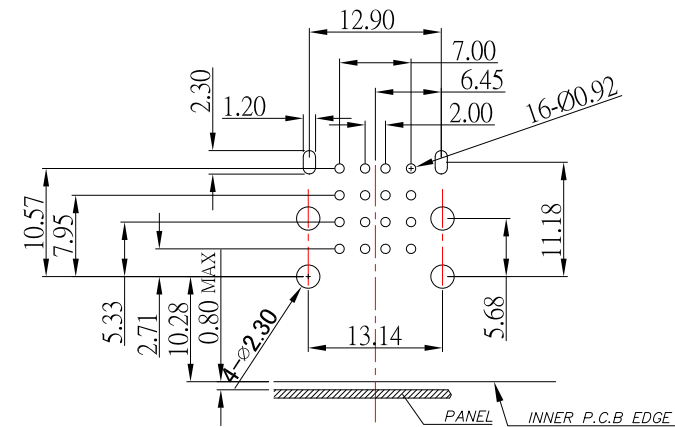
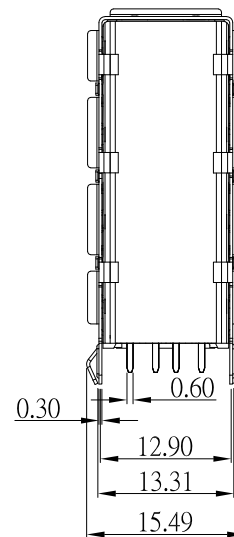
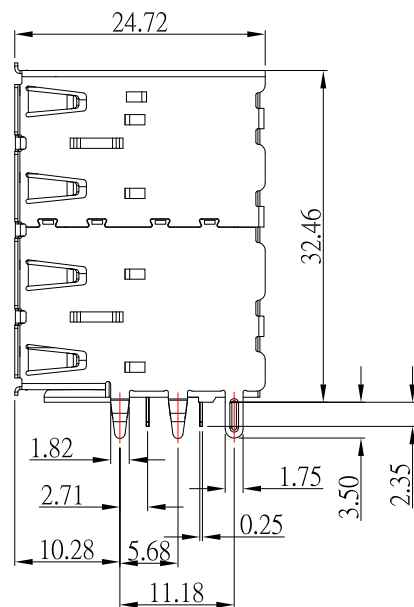


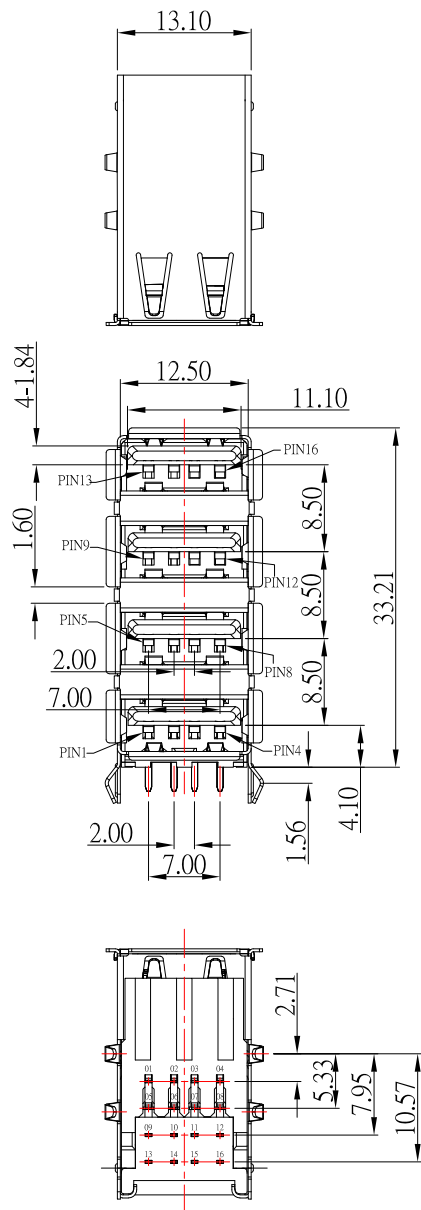

PCB LAYOUT

SPECIFICATIONS

Electrical:

- 1.Current Rating: 1.0 A
- 2.Dielectric Withstanding Voltage: AC 500 V / 1MIN
- 3.Insulation Resistance: 1000 MΩ Min
- 4.Contact Resistance: 30 mΩ Max

Material:

- 1.Housing: PBT
- 2.Contact: Brass
- 3.Shell: SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

PPOJECTION

照片框

ORDER INFORMATION

USB1-FRXxx-4A-LF

SERIES

LEADFREE

4 PIN A TYPE

BK:BLACK

WH:WHITE

FEMALE

NO SPRING

DIP 90°

DESCRIPTION: USB A/F 4 層