
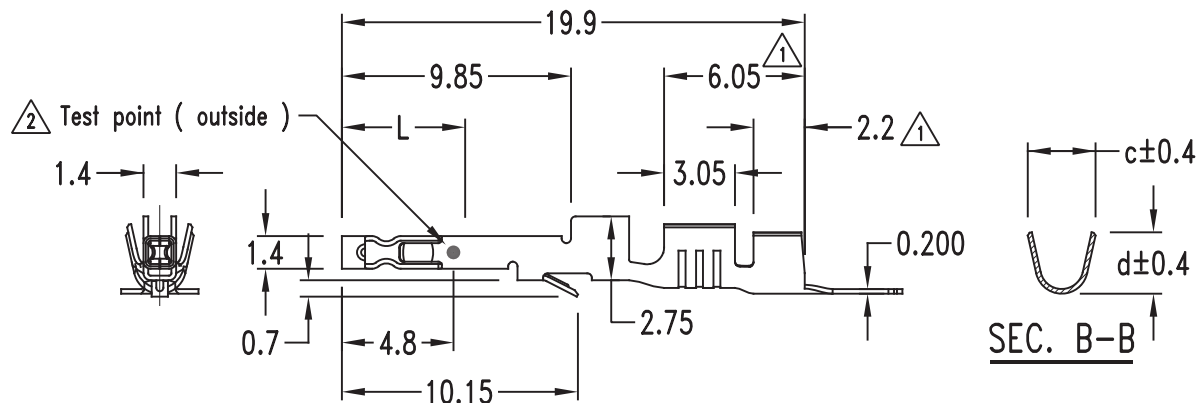


## Features:

- Material: High conductivity copper alloy
- Wire range: #16 ~ #22 AWG


## Specification:

- △<sub>1</sub> • Current rating: 14A at #16 AWG for 2 poles  
8A at #16 AWG for other poles
- Voltage rating: 400V AC (RMS) or 400V DC Max.
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1800V AC/minute
- Ambient temperature range: -40°C ~ 105°C

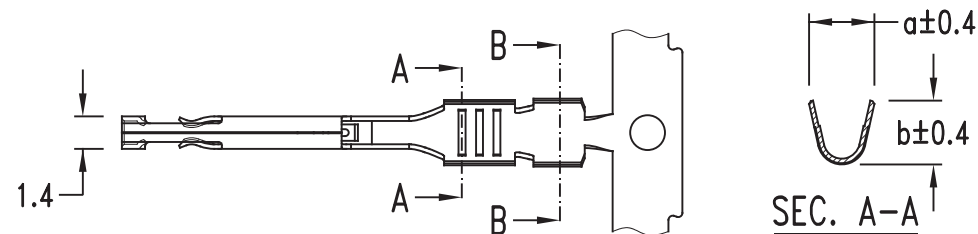

## Ordering & Dimensional Information ( mm )

| Part No.  | Wire range | Dim. a | Dim. b | Dim. c | Dim. d | Finished                                         |
|-----------|------------|--------|--------|--------|--------|--------------------------------------------------|
| UTF-FT-20 | #20 ~ #22  | 2.18   | 2.18   | 2.33   | 2.08   | Tin-plated 100u" over copper 50u" △ <sub>1</sub> |
| UTF-FT-16 | #16 ~ #18  | 2.8    | 2.7    | 2.9    | 2.63   |                                                  |



**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±  
.X ± 0.40  
.XX ± 0.25  
.XXX ± 0.08  
ANG ±

照片框

ORDER INFORMATION

UTF-FT-xx-LF  
SERIES T LEADFREE  
16:16~18 AWG  
20:20~22 AWG  
TERMINAL  
FEMALE

DESCRIPTION: .138"(3.5mm) Crimp Terminal