


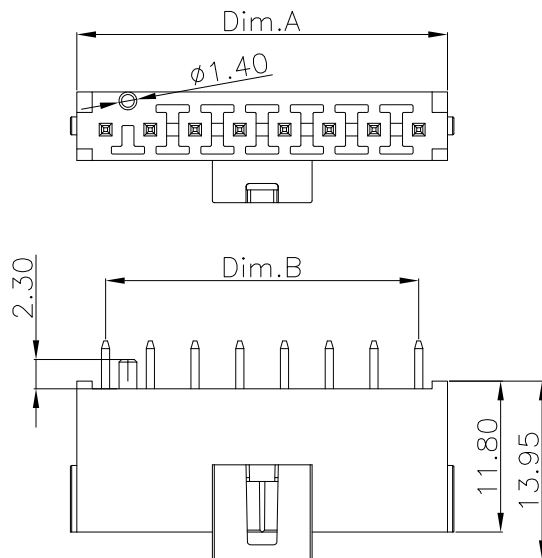



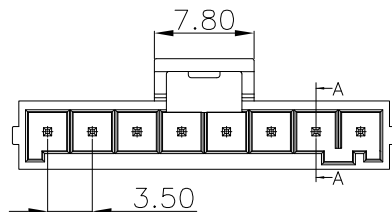

Circuits	DIM A	DIM B
2	8.00	3.50
3	11.50	7.00
4	15.00	10.50
5	18.50	14.00
6	22.00	17.50
7	25.50	21.00
8	29.00	24.50

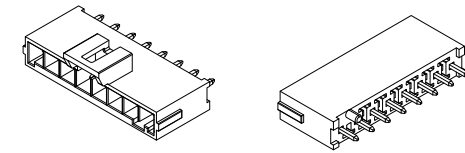


SEC:A-A

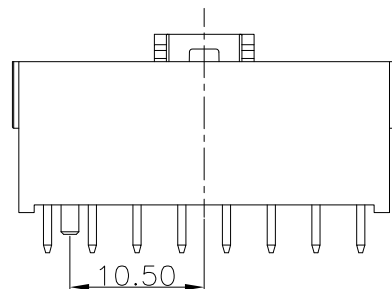

Specifications:
 Current Rating:14.0A AC/DC
 Voltage Rating:400V AC/DC
 Contact Resistance:10m ohm. max.
 Insulation Resistance:1000M ohm. min.
 Withstanding Voltage:1800V AC For One Minute
 Operating Temperature Range:-40°C ~ +120°C

Material
 Insulator:LCP (UL94V-0)
 Insulator Color:Black
 Contact:Brass
 Plating:Matte Tin plated

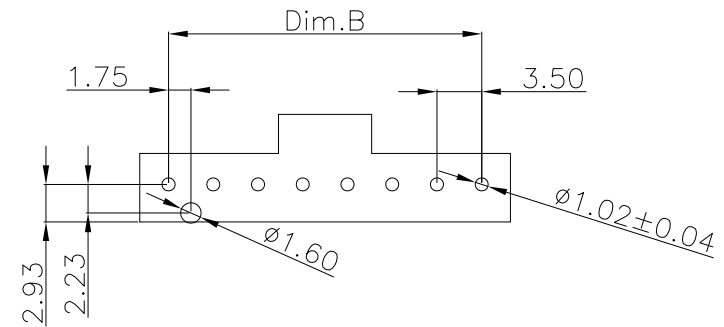

P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±

照片框


ORDER INFORMATION

UTF-PDPBK-1Xxx-LF
 SERIES
 MALE
 BLACK
 POST
 DIP 180°
 LEADFREE
 1X02:02 WAY
 1X08:08 WAY


DESCRIPTION:




2 PIN




3 PIN




4 PIN




5 PIN



6 PIN



7 PIN



8 PIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UTF-PDPBK-1Xxx-LF
SERIES
MALE
BLACK
POST
DIP 180°
LEADFREE
1X02:02 WAY
1X08:08 WAY

DESCRIPTION: