


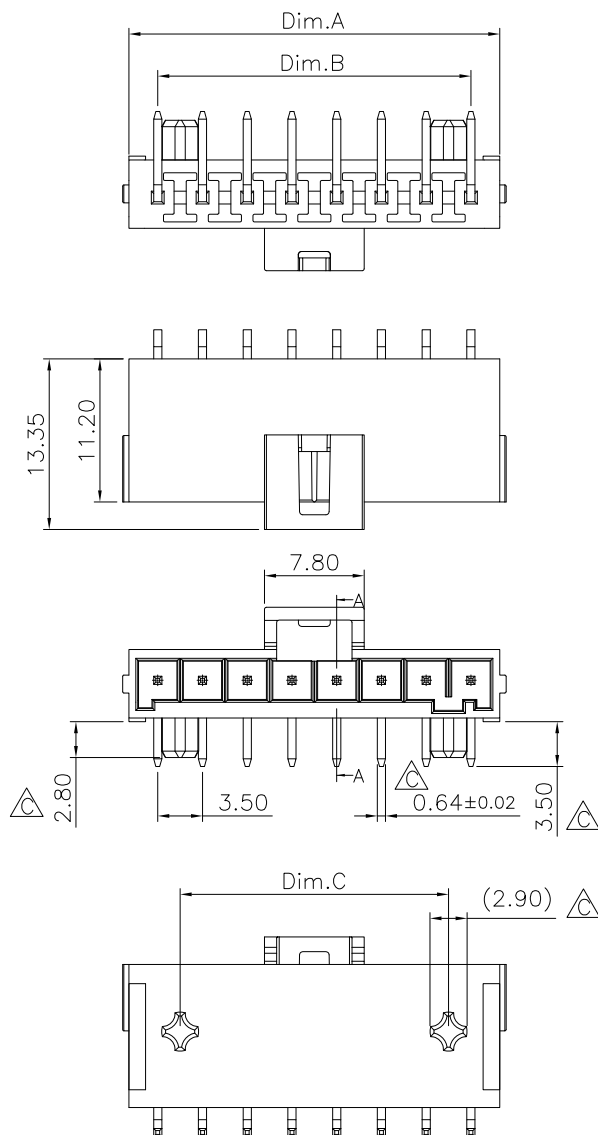





Circuits	DIM A	DIM B	Dim C
2	8.00	3.50	
3	11.50	7.00	
4	15.00	10.50	7.00
5	18.50	14.00	10.50
6	22.00	17.50	14.00
7	25.50	21.00	17.50
8	29.00	24.50	21.00

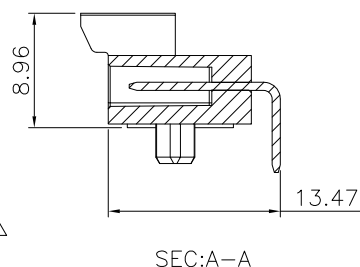

For 2P

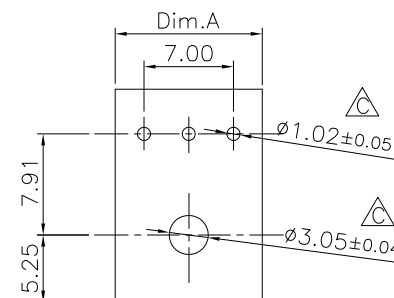

For 3P

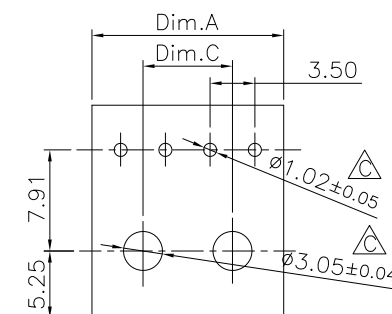


For 4~8P

P.C.B Layout

Specifications:
 Current Rating:7~14.0A AC/DC
 Voltage Rating:400V AC/DC
 Contact Resistance:10m ohm. max.
 Insulation Resistance:1000M ohm. min.
 Withstanding Voltage:1800V AC For One Minute
 Operating Temperature Range:-40°C ~ +120°C

Material
 Insulator:LCP (UL94V-0)
 Insulator Color:Black
 Contact:High Performance Alloy
 Plating:Matte Tin plated



RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±


PPOJECTION

照片框


ORDER INFORMATION

UTF-PRPBK-1Xxx-LF
 SERIES LEADFREE
 1X02:02 WAY
 1X08:08 WAY
 MALE BLACK
 POST
 DIP 90°


DESCRIPTION: 3.5mm Power Wafer R/A Single Row Dip Type




2 PIN




3 PIN




4 PIN




5 PIN



6 PIN



7 PIN

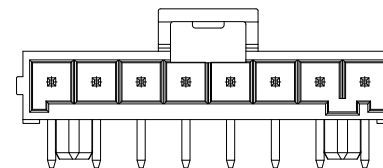

8 PIN

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UF35-PRPBK-1Xxx-LF

SERIES

MALE

LEADFREE

1X02:02 WAY

1X08:08 WAY




BLACK

POST
DIP 90°


DESCRIPTION: 3.5mm Power Wafer R/A Single Row Dip Type

Note:
1.Dimesion
Tube Size:17.8(H)X11.8(W)X635(L) (mm)
Inner Carton Size:650(L)X140(W)X125(H) (mm)
Carton Size:680(L)X280(W)X300(H) (mm)
2.Quantity:
XX Pcs/Tube
40 Tube/Inner Carton
4 Inner Carton/Carton

Pin.	Pcs/Tube	Pcs/Inner Carton	Q'TY/Carton
2	76	3,040	12,160
3	53	2,120	8,480
4	41	1,640	6,560
5	33	1,320	5,280
6	27	1,080	4,320
7	24	960	3,840
8	21	840	3,360

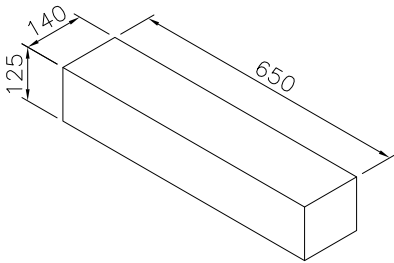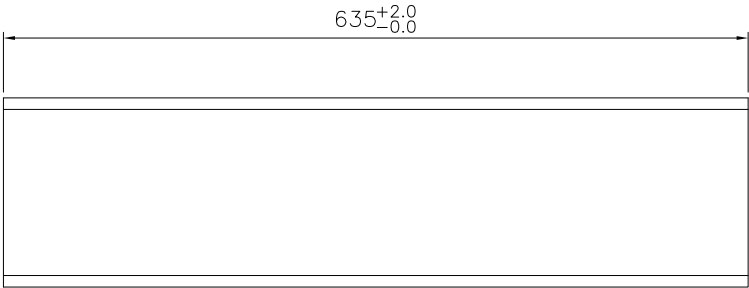

Inner Carton

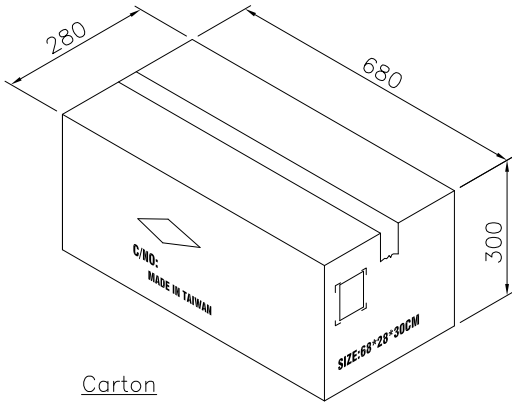

Carton

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UF35-PRPBK-1Xxx-LF

SERIES

MALE

POST

DIP 90°

BLACK

LEADFREE

1X02:02 WAY

1X08:08 WAY

DESCRIPTION: 3.5mm Power Wafer R/A Single Row Dip Type