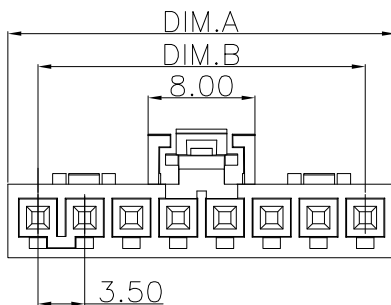
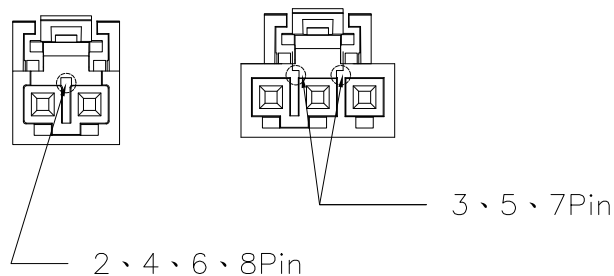
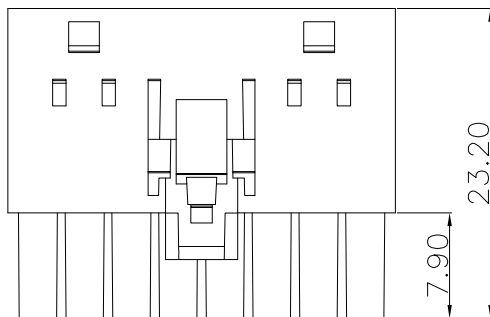


△ Specifications:
 Current Rating:7~14.0A AC/DC
 Contact Resistance:10m ohm. max.
 Insulation Resistance:1000M ohm. min.
 Withstanding Voltage:1800V AC For One Minute
 Operating Temperature Range:-40°C ~ +105°C
 Application Wire:AWG#16 to #22

Material
 Insulator:NYLON66 (UL94V-0)
 Insulator Color:Black

Circuits	Dim.A	Dim.B
2	8.00	3.50
3	11.50	7.00
4	15.00	10.50
5	18.50	14.00
6	22.00	17.50
7	25.50	21.00
8	29.00	24.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ± 0.10
 .XX ± 0.05
 .XXX ±
 ANG ±


PPOJECTION

照片框


ORDER INFORMATION

UTF-SHBK-1Xxx-LF
 SERIES
 LEADFREE
 1X02:02WAY
 1X08:08WAY
 BLACK
 HOUSING
 FEMALE


DESCRIPTION: 3.5mm Power Housing




2 PIN




3 PIN




4 PIN

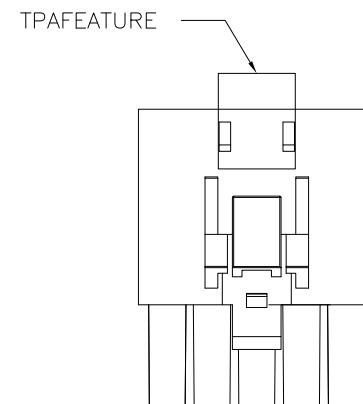


5 PIN

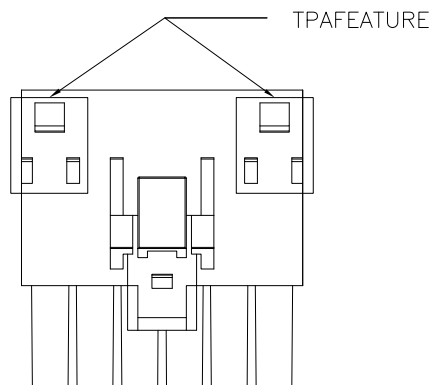

6 PIN



7 PIN

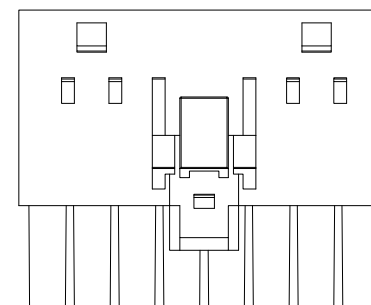

8 PIN

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.10
.XX ± 0.05
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UTF-SHBK-1Xxx-LF
SERIES
LEADFREE
1X02:02WAY
1X08:08WAY
BLACK
HOUSING
FEMALE

DESCRIPTION: 3.5mm Power Housing