
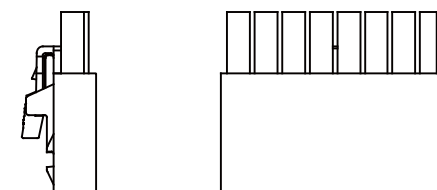
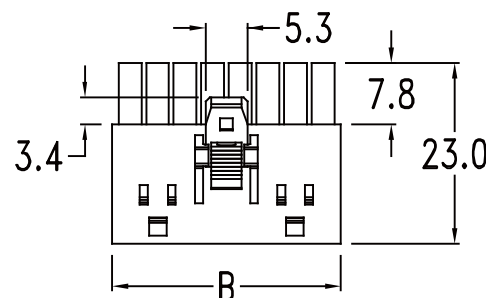
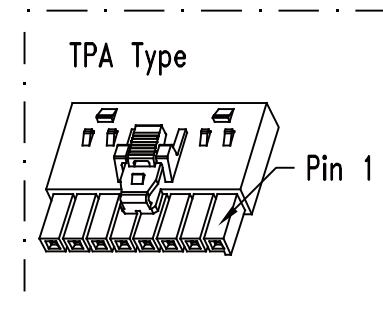


Features:

- 2 ~ 8 circuits available
- Material: PA4T, UL 94V-0

Specification:

- △
- Current rating: 14A at #16 AWG for 2 poles
8A at #16 AWG for other poles
 - Voltage rating: 400V AC (RMS) or 400V DC Max.
 - Insulation resistance: 1000MΩ Min.
 - Dielectric withstanding voltage: 1800V AC/minute
 - Ambient temperature range: -40°C ~ 105°C

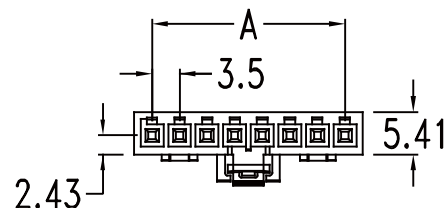



Ordering Information

Part No.	Feature	Type	Color
UTF-SHBK-1Xxx	TPA Type	Key A	Black
UTF-SHWH-1Xxx	TPA Type	Key B	Natural

Dimensional Information (mm)

Circuits	Dim. A	Dim. B
N	$3.5 \times (N - 1)$	$3.5 \times N + 1$

&& N = 2 ~ 8

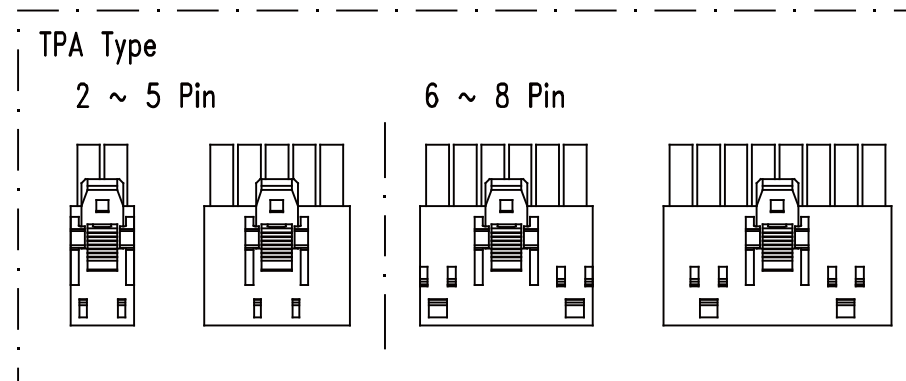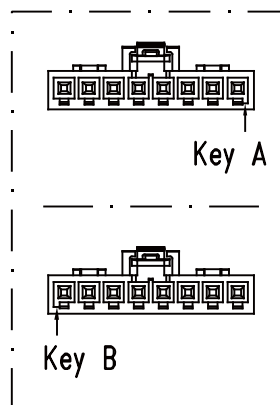

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

UTF-SHcc-1Xxx-LF
SERIES | LEADFREE
1X02:02WAY
1X08:08WAY
FEMALE | BK:BLACK
WH:NATURAL
HOUSING

DESCRIPTION: .138"(3.5mm) Single Row Housing