



1P






2Pto6P

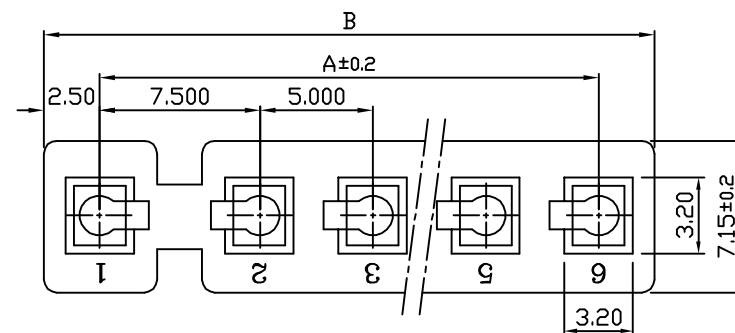

Specifications:

- Poles: 1~6 Poles
- Pitch Between Poles: 7.5mm/5.0mm
- Current Rating: 5A
- Voltage Rating: 250V AC, DC
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial value/10mΩ max
After environmental testing/20mΩ
- Withstand Voltage: 1500V AC/minute
- Insulation Resistance: 1000 MΩ/min
- Material: Nylon UL94V-0

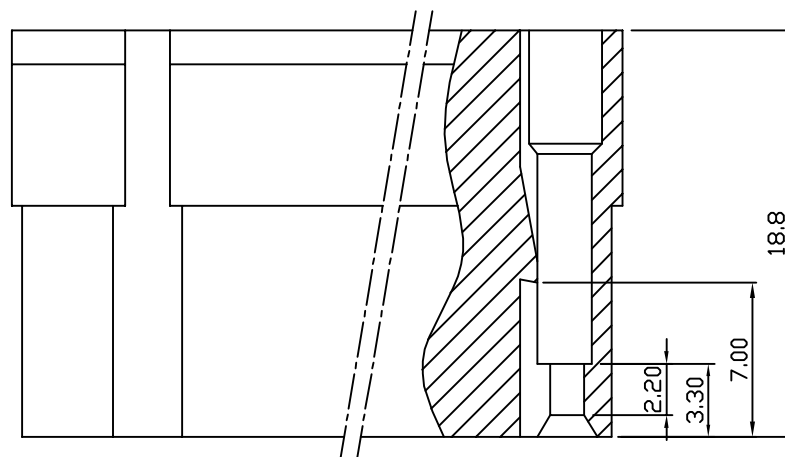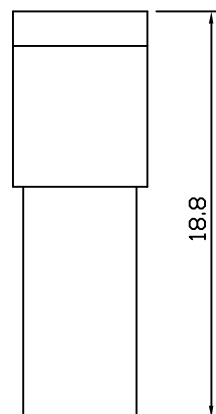

Dimensional & Ordering Information:

Cir- cuits	Part No	Dimension mm		Q'ty/bag
		A	B	
01	V-H-01	—	—	1000
02	V-H-02	7.5	12.5	1000
03	V-H-03	12.5	17.5	1000
04	V-H-04	17.5	22.5	1000
05	V-H-05	22.5	27.6	500
06	V-H-06	27.5	32.6	500

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PROJECTION

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

V-H-xx-LF
SERIES | T LEADFREE
01~06 AWG
HOUSING

DESCRIPTION: