
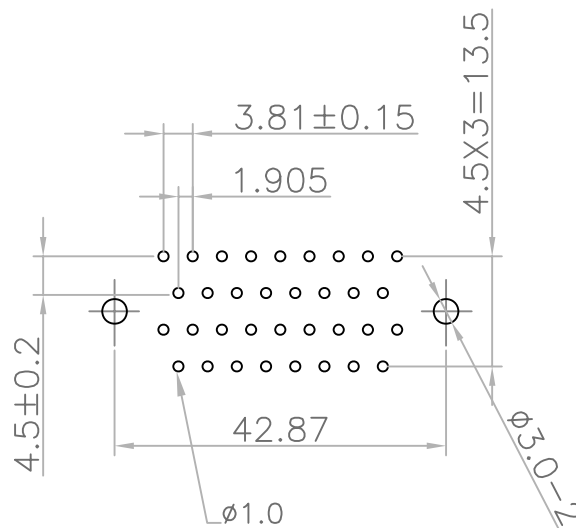

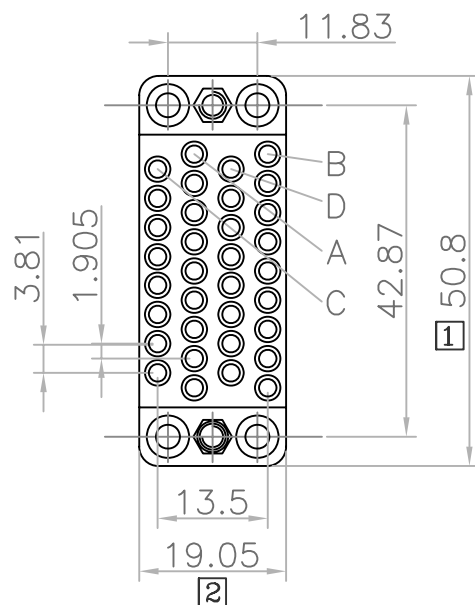


SCREW



MECHANICAL

INSULATOR MATERIAL:

PBT & Glass-fibre reinforced
UL-94-V0

CONTACT:

Phosphor bronze

ELECTRICAL

CURRENT RATING:

7 Amp

WITHSTANDING VOLTAGE:

AC 1200V Min. (for one minute)

INSULATION RESISTANCE:

1000MΩ Min.(at 500V DC)

CONTACT RESISTANCE:

10mΩ Max. mated

WORKING TEMPERATURE:

-55°C to +105°C

MATING CYCLE

300 Times Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

V35-SD-34-LF
SERIES T LEADFREE
34WAY
DIP 180°
FEMALE

DESCRIPTION: V. 35 P. C. B. STRAIGHT TYPE FEMALE