

FEATURES:

- 34 pos connection system
- Fully EMI/RFI shielded


MATERIALS:

- Housing: Plastic thermoplastic
P.B.T UL94V-0
- Contacts: Phosphor bronze or brass gold
- Front shell: Ferrum, tin plated over copper
- Cover: PE
- Shell Cover: Metal Nickel plated
- Jackscrew: Metal Nickel plated
- Lock Washer: Metal Nickel Plated
- Screw Lock: Metal Nickel plated

ELECTRICAL:

- Current Rating: 7 Amp
- Insulation Resistance: >1000MΩ/Min AT 500V DC
- Withstanding Voltage: AC 1200V Min
- Contact Resistance: 10mΩ Max
- Temperature Range: -55°C ~ +105°C

● Ordering Information

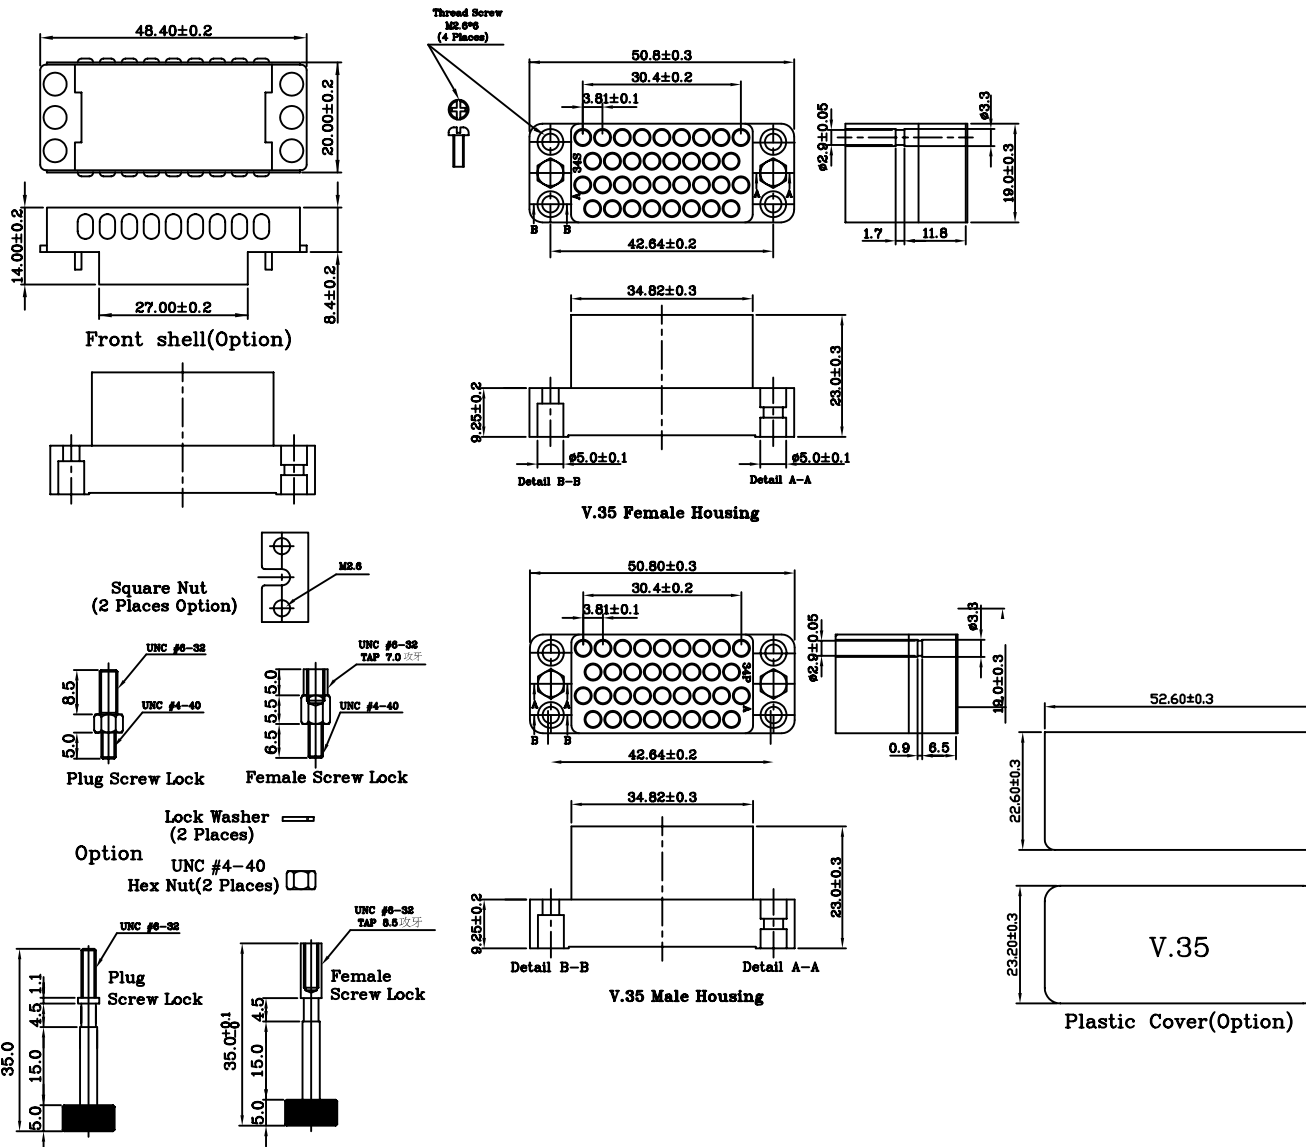

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG ±

照片框

ORDER INFORMATION

V35-SHM-34-LF
SERIES | LEADFREE
34WAY
METAL
HOUSING
FEMALE

DESCRIPTION: V.35 Series Crimp Snap-In Contact Connector