
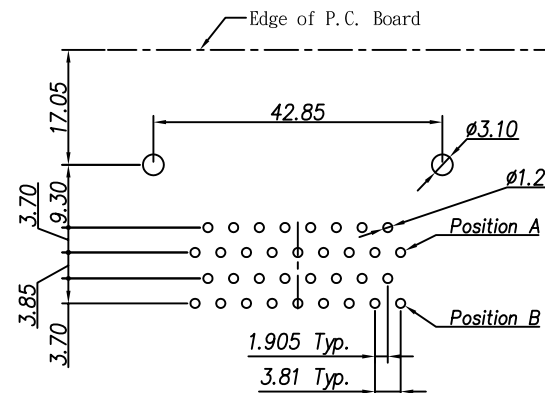
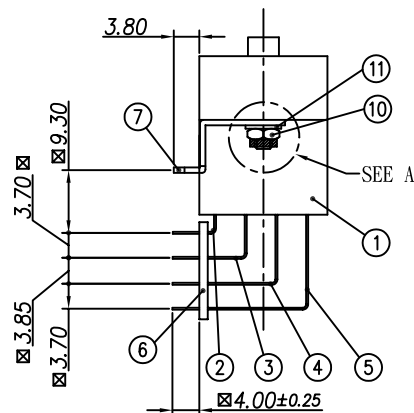



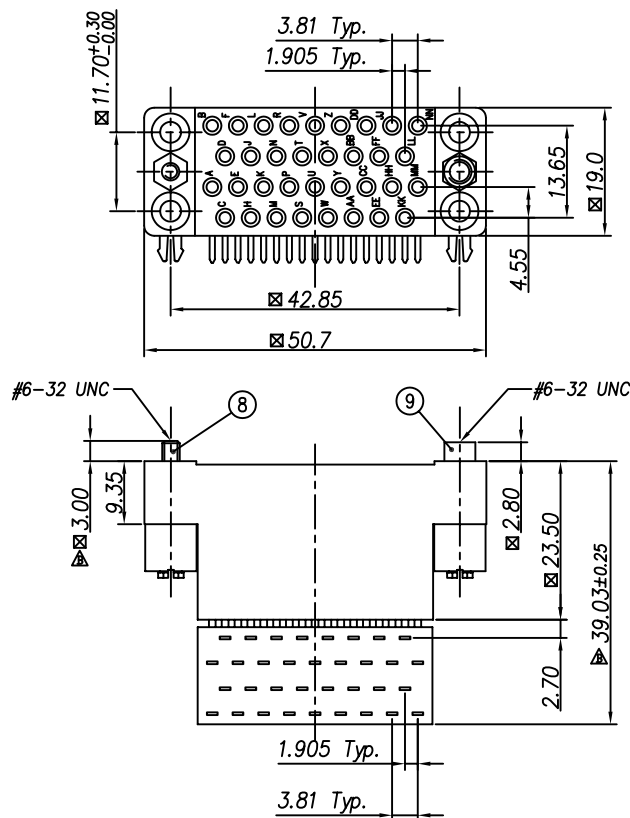

Recommended P.C.B. Layout

1. ELECTRICAL:
CURRENT RATING:5 Amp
DIELECTRIC WITHSTANDING VOLTAGE:AC 500V Min. (for 1 minute)
INSULATION RESISTANCE:500M ohms min. (at 500V DC)
CONTACT RESISTANCE:25 mΩ max. mated
OPERATING TEMPERATURE:-55°C to +105°C
2. TERMINAL PLATING:
TERMINAL CONTACT AREA PLATING GOLD;
A:AU (G/F) THICKNESS=1 MICREINCH MAX
SOLDER TAIL:TIN(Sn), THICKNESS=100 MICREINCH MIN
UNDER PLATE:(Ni), THICKNESS=50 MICREINCH MIN
B:AU THICKNESS= * MICREINCH MAX
SOLDER TAIL:TIN(Sn), THICKNESS=100 MICREINCH MIN
UNDER PLATE:(Ni), THICKNESS=50 MICREINCH MIN
- 3."A"依照客戶需求：點膠

11	WASHER	SPCC	NICKEL		2
10	NUT	SPCC	NICKEL		2
9	SCREW FEMALE	BRASS #6-32 UNC	NICKEL		1
8	SCREW MALE	BRASS #6-32 UNC	NICKEL		1
7	BOARD LOCK	BRASS	NICKEL/TIN	0.80mm	2
6	SPACER	PBT+30%G. F. UL 94V-0			1
5	TERMINAL -3	PHOSPHOR BRONZE	G/F; *U*; GoLD ALL*U*	0.30mm	9
4	TERMINAL -3	PHOSPHOR BRONZE	G/F; *U*; GoLD ALL*U*	0.30mm	8
3	TERMINAL -2	PHOSPHOR BRONZE	G/F; *U*; GoLD ALL*U*	0.30mm	9
2	TERMINAL -1	PHOSPHOR BRONZE	G/F; *U*; GoLD ALL*U*	0.30mm	8
1	MAIN BODY	PBT+30%G. F. UL 94V-0			1
NO.	PART NAME.	DESCRIPTION	PLATING	THICKNESS	Q' TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.15
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

V35-SRL-34-LF
SERIES
LEADFREE
34 WAY
LONG
DIP 90°
FEMALE

DESCRIPTION: V. 35 P.C.B. FEMALE RIGHT ANGLE