

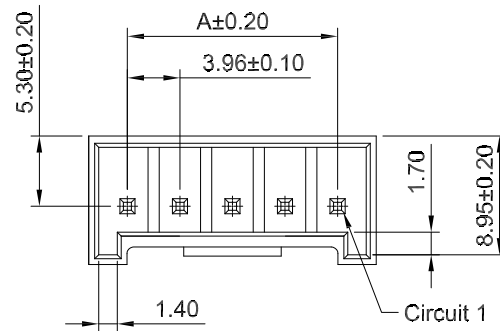

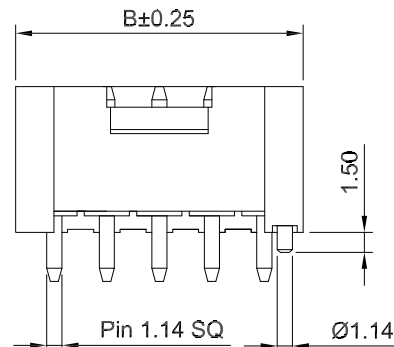


2~3P

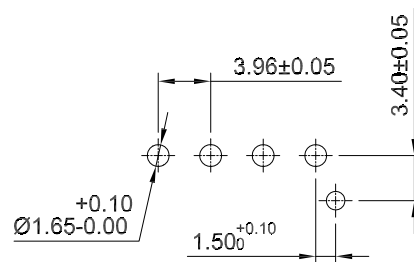


4~15P

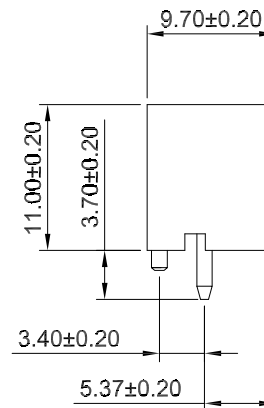

P.C.B LAYOUT

#### SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)  
Voltage Rating: 250V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 10mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1500V AC/minute  
Pin Material: Brass/Tin over Nickel  
Material: PBT+30%GF,UL94V-0(White)



#### Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2P       | 3.96           | 9.80  | 9P       | 31.68          | 37.52 |
| 3P       | 7.92           | 13.76 | 10P      | 35.64          | 41.48 |
| 4P       | 11.88          | 17.72 | 11P      | 39.60          | 45.44 |
| 5P       | 15.84          | 21.68 | 12P      | 43.56          | 49.40 |
| 6P       | 19.80          | 25.64 | 13P      | 47.52          | 53.36 |
| 7P       | 23.76          | 29.60 | 14P      | 51.48          | 57.32 |
| 8P       | 27.72          | 33.56 | 15P      | 55.44          | 61.28 |

#### RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ± 0.10  
ANG ±

PPOJECTION

照片框

#### ORDER INFORMATION

VH-DBP-xx-LF  
SERIES POST BOX  
LEADFREE  
02~12 WAY  
DIP 180°

DESCRIPTION: 3.96mm Wire to Board DIP TYPE