

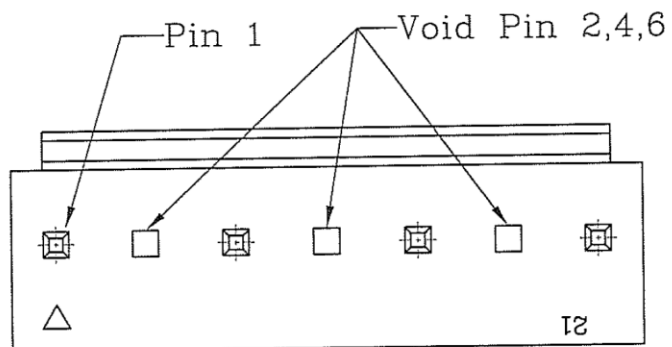


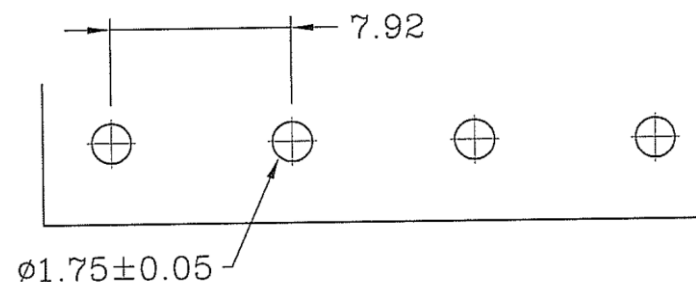

Material: * Insulator: Nylon 66 UL 94V-0
 * Contact: 1.14mm Tin Plated Square Pin
 * Note: U--Void 2nd, 4th, 6th Pin
 Unit Quantity: 500 Pcs/Bag

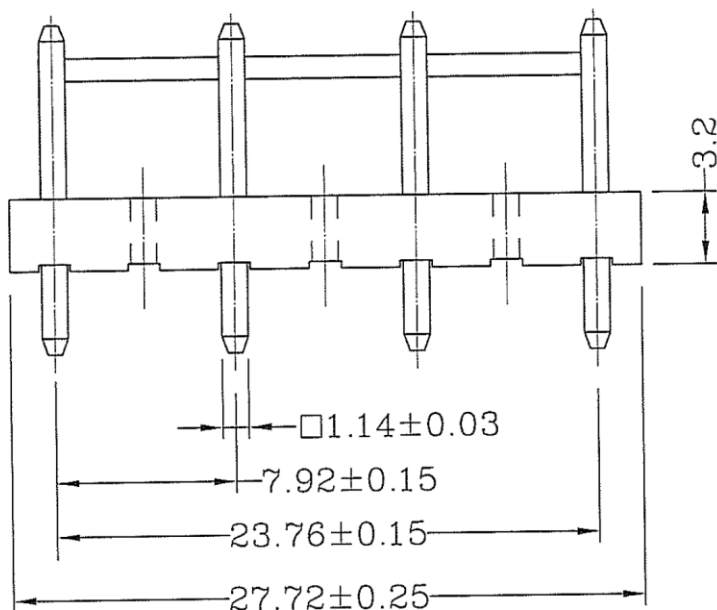

P.C.B. LAYOUT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

VH-DEE-04-LF
 SERIES | LEADFREE
 04WAY
 EMPTY #2.4.6
 DIP 180°

DESCRIPTION: