

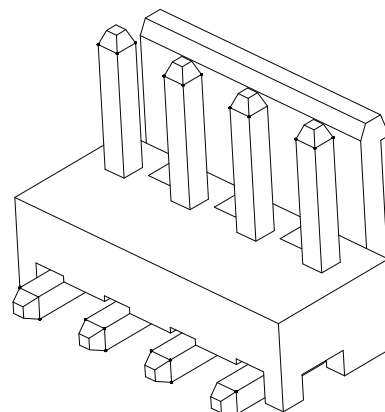
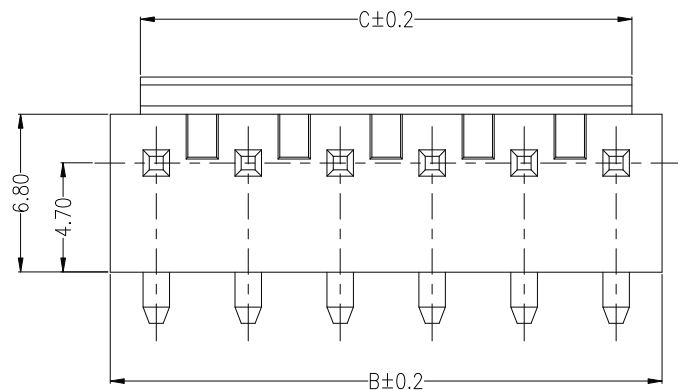
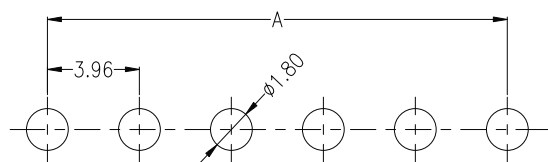


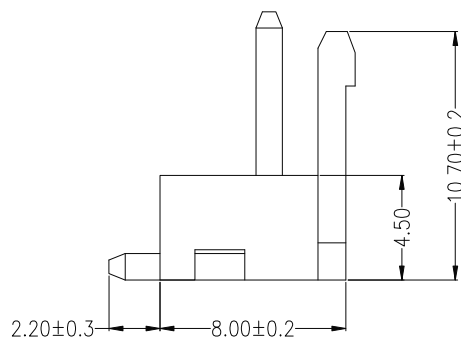

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 1000\text{M}\Omega$
 Rated voltage: 250V AC DC
 Rated current: 7.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Housing: LCP UL94V-0, Natural
 Contacts: Brass /Sn

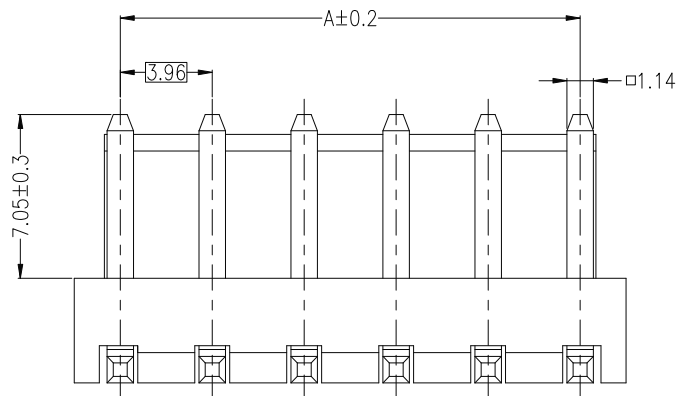

RECOMMENDED PCB LAYOUT(TOP VIEW)
 TOLERANCE: $\pm 0.05\text{mm}$

Circuits	Dimensions(mm)		
	A	B	C
02	3.96	7.92	5.32
03	7.92	11.88	9.28
04	11.88	15.84	13.24
05	15.84	19.80	17.20
06	19.80	23.76	21.16
07	23.76	27.72	25.12
08	27.72	31.68	29.08

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30


.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG $\pm 1^{\circ}$


PPOJECTION



ORDER INFORMATION


VH-RR-xx-LF
 SERIES REEL LEADFREE
 02~08WAY
 DIP 90°

DESCRIPTION:


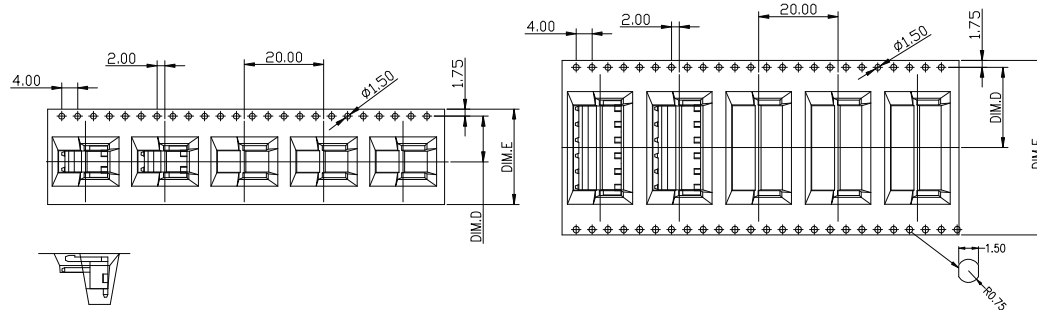


02~03 CONTACTS

04~06 CONTACTS

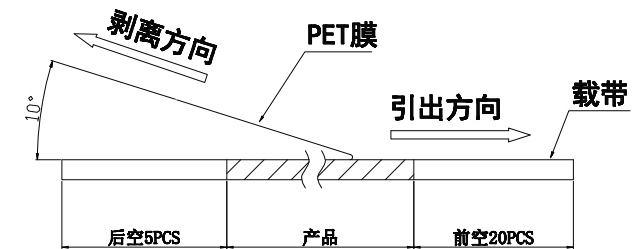

(PET膜剥离示意图)

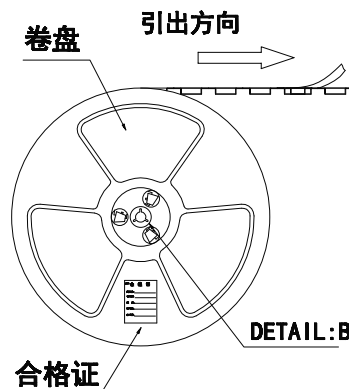



列表一

DETAIL:B

Circuits	DIM. D	DIM. E	Q'ty/Reel	Packing (Reel/Carton)
02-03PIN	11.5	24	250PCS	15/Reel
04PIN	14.25	32	250PCS	11/Reel
05-06PIN	20.2	44	250PCS	8/Reel

包裝說明:

- 1.把成品包入捲盤中,每盤裝250PCS,捲盤上貼上合格證,將裝好產品的捲盤放進外箱中,外箱內先套一個大PE袋,外箱上貼貼上合格證.
- 2.所有材料有害物控制需符合RoHS標準.

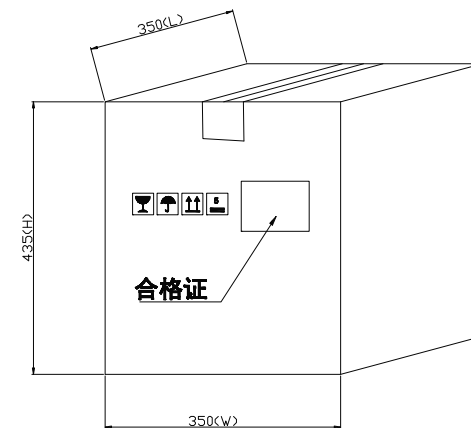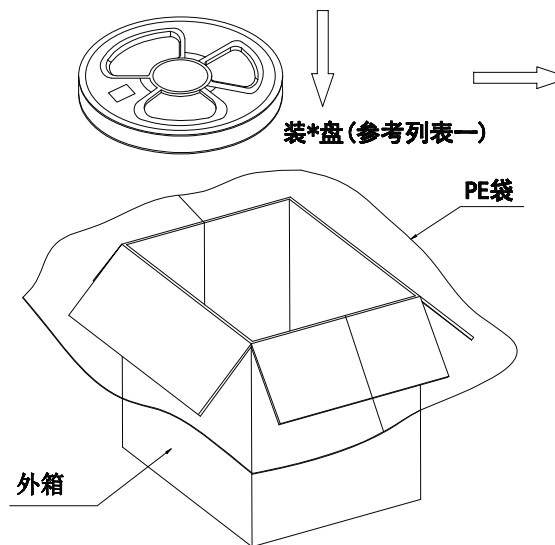

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30


.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION



ORDER INFORMATION

VH-RR-xx-LF
SERIES REEL LEADFREE
02~08WAY
DIP 90°

DESCRIPTION: