


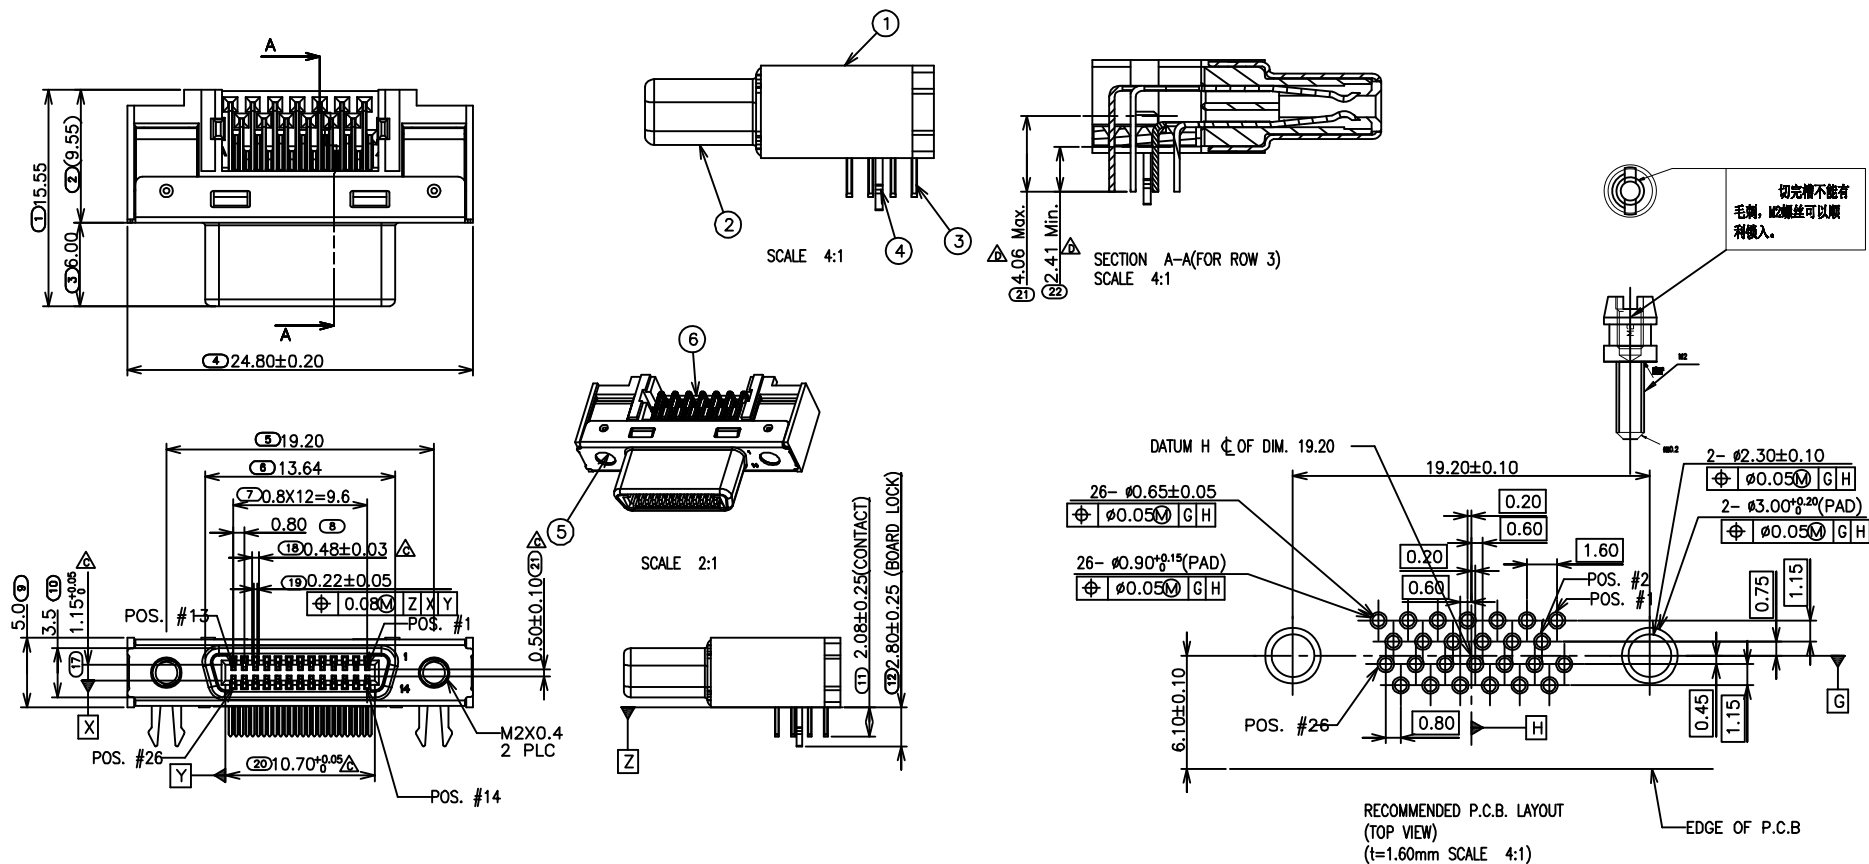

Rated voltage	30V AC(r. m. s.)
Rated current	0.3A
Insulation resistance	Over 500 megohms at 100V DC
Dielectric withstanding voltage	250V AC(r. m. s.)
Contact resistance	70 milliohms or less (for combination of MA or MA1 and LFDT) 100 milliohms or less (for combination with MA1 and W1LFDT)

6	TINE PLATE	1	I-HMR20-B26K00	PA9T GF33% BLACK
5	NUT	2	H-HMR20-B26K0	COPPER ALLOY
4	BOARD LOCK	2	H-HMR20-A0200	PHOSPHOR BRONZE
3	CONTACT	26	T-HMR20-10X00	PHOSPHOR BRONZE,Au
2	SHELL	1	S-HMR20-F26200	SPCC NICKEL
1	HOUSING	1	I-HMR20-A26K00	PA9T GF33% BLACK
ITEM	NAME	Q'TY	PART#	MATERIAL/FINISH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

VHC-SRN-026-LF
SERIES | | | LEADFREE
| | | 26 WAY
| | | NUT
| | | DIP 90°
| | | FEMALE

DESCRIPTION: 26PIN母座弯插板