
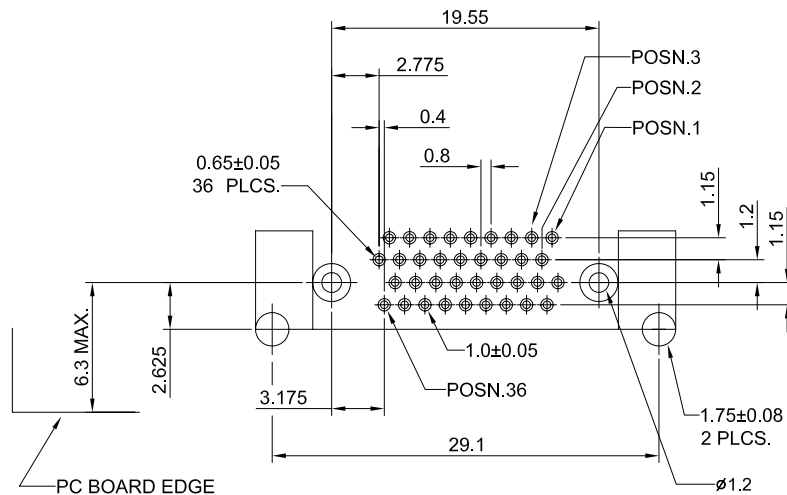
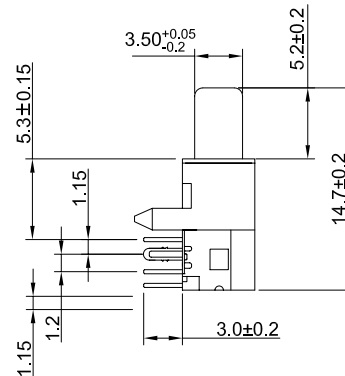
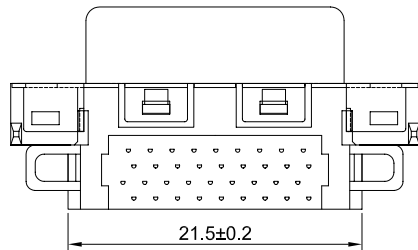


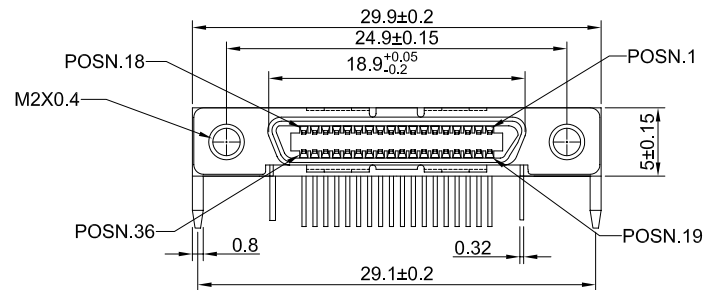

RECOMMENDED P C BOARD LAYOUT

(36 POSITION ONLY) TOLERANCE: ± 0.05

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING: 0.5 AMPERE
DIELECTRIC WITHSTANDING VOLTAGE: 250 VAC
INSULATION RESISTANCE: 500 MEGOHMS MIN.
CONTACT RESISTANCE: 80 MILLIOHMS MAX.

MATERIALS

CONTACTS: COPPER ALLOY
INSULATOR: THERMOPLASTIC 94V-0
SHELL: COLD ROLLER STEEL

FINISHES

CONTACT: 30 μ " MIN. GOLD ON MATING END;
TIN ON TERMINATION END;
ALL UNDERPLATED NICKEL
SHELL: NICKEL OVER COPPER

ENVIRONMENT

OPERATION TEMPERATURE: -55°C TO +85°C

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.25

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX $\pm$

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

VHC-SRN-036-LF
SERIES | | | LEADFREE
| | | 36 WAY
| | | NUT
| | | DIP 90°
| | | FEMALE

DESCRIPTION: VHDCI 0.8mm R/A Receptacle Connectors

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com