
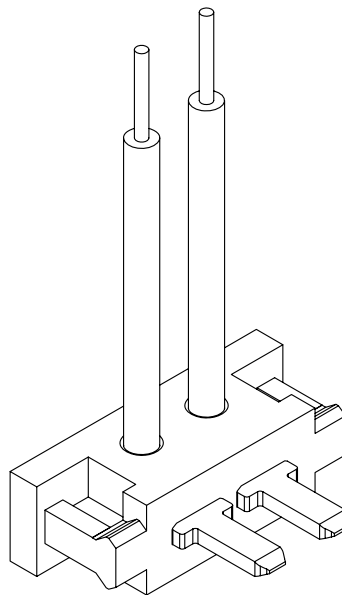


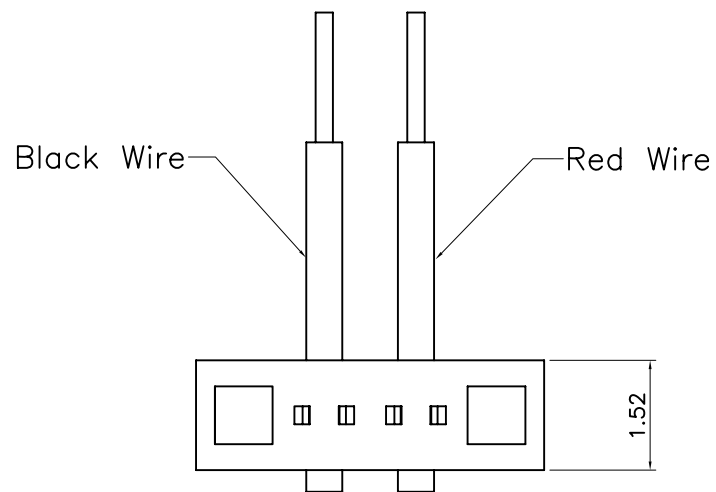

Material:

Housing: Polycarbonate UL94V-2.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 500V For 1 minute.



Insulator Resistance: 500MΩ at DC 500V.

Contact Resistance: 30mΩ at DC 100mA.

Operating Temperature: -55°C~+85°C.

***RoHS Compliant**

Wire	Color	L (mm)									AWG
I	Red	L1=28	L2=40	L3=50	L4=20	L5=35	L6=21	L7=30	L8=60	L9=70	AWG #32/#30, UL Style 1571
II	Black										

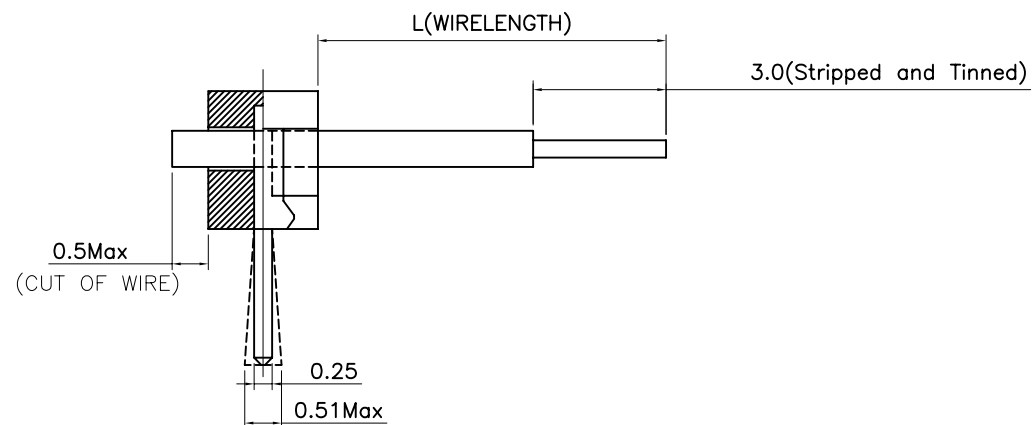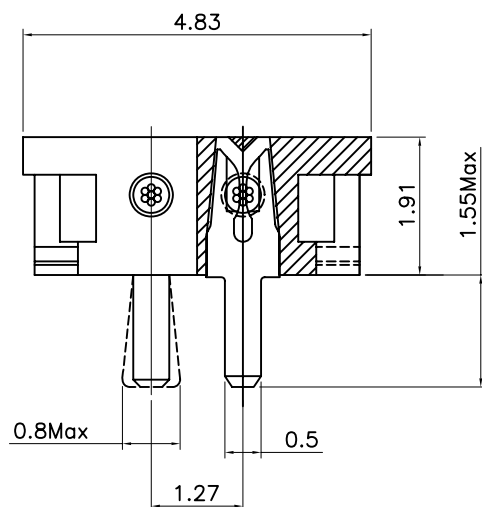

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

VIBX-020032-Mxxx-LF

SERIES

02 WAY

MALE

32 AWG

LEADFREE

2C8:28mm

DESCRIPTION: