
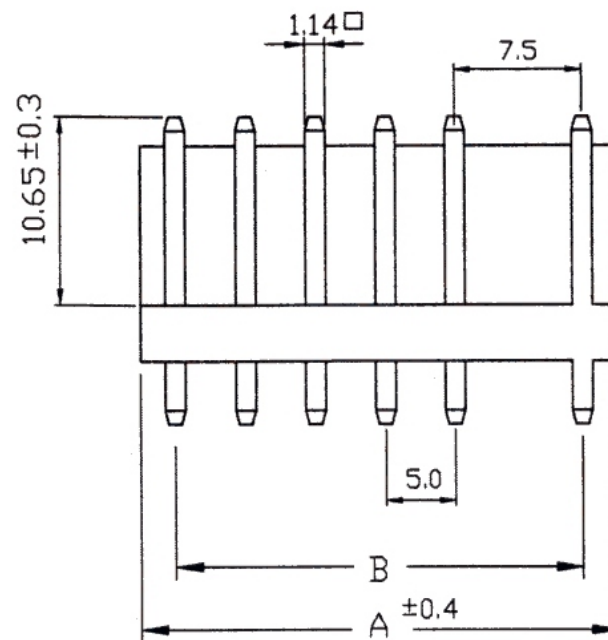


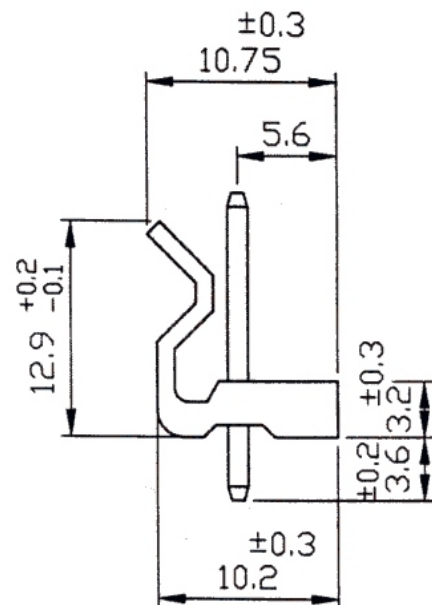

MAT'L: BODY: NYLON 66 UL94V-2
 PINS: BRASS TIN PLATED
 CURRENT RATING: 5A AC,DC
 VOLTAGE RATING: 250V AC,DC

PART NO.	A	B
VK-D-02	12.5	7.5
VK-D-03	17.5	12.5
VK-D-04	22.5	17.5
VK-D-05	27.5	22.5
VK-D-06	32.5	27.5
VK-D-07	37.5	32.5
VK-D-08	42.5	37.5
VK-D-09	47.5	42.5
VK-D-10	52.5	47.5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

VK-D-xx-LF
 SERIES | LEADFREE
 02~10 WAY
 DIP 180°

DESCRIPTION: