

Features:


- 2 ~ 6 circuits available
- UL 94V-2 nylon 66
- Polarization through varied center spacing between circuit 1 & 2
- .045"(1.14mm) square pin
- Tin-plated brass pins. Plating options available

Specifications:

- Current rating: 7A
- Voltage rating: 250V AC,DC
- Dielectric withstanding voltage: 1500V AC/minute
- Contact resistance: 20mΩ Max.
- Ambient temperature rise: -40°C ~ 105°C

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	7.5	12.5	5	22.5	27.5
3	12.5	17.5	6	27.5	32.5
4	17.5	22.5			

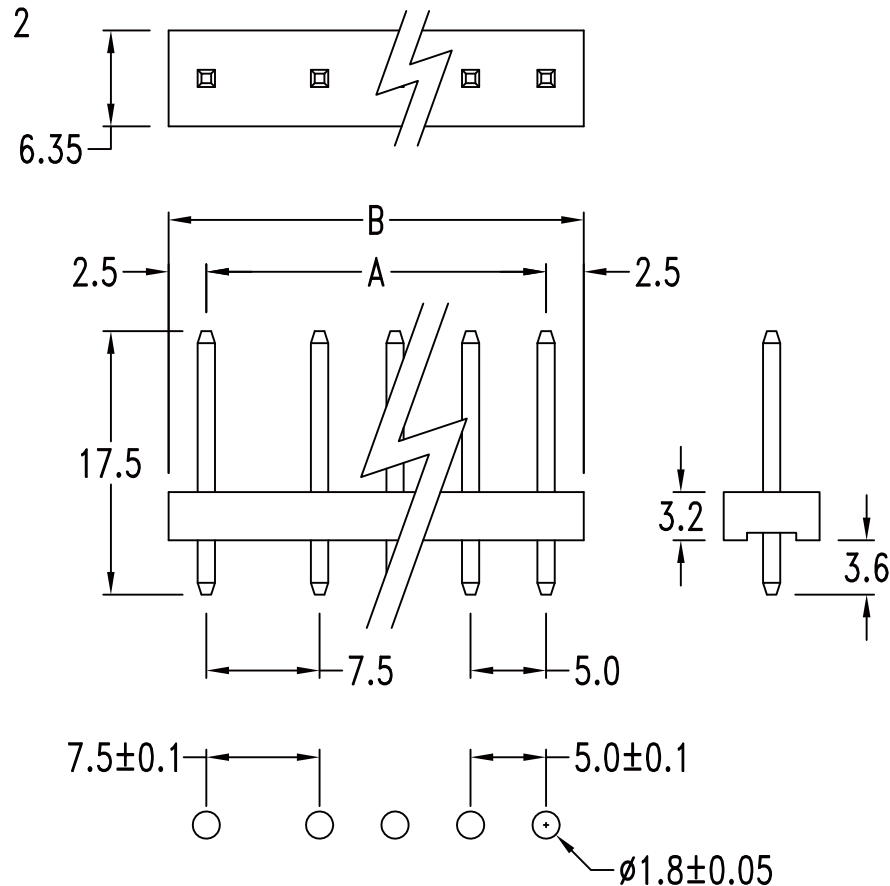

P. C. Board Hole Dimensions

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

VKX-D-xx-LF
SERIES T LEADFREE
02-06 WAY
DIP 180°

DESCRIPTION: