



SPECIFICATIONS

Current Rating: 0.3 Amps
 Insulator resistance: 100 Megohms min.
 Contacts resistance: 60 m ohms max.
 Dielectric withstanding: AC 500V
 Operating Temperature: -40°~+85°C
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Natural
 Color: Natural
 Finish: Gold plated
 ©Standard: Gold flash all over

CIRCUITS	DIM A	DIM B	W/A	W/B
10	2.00	3.98	○	○
12	2.50	4.48	○	○
14	3.00	4.98	○	○
16	3.50	5.48	○	○
18	4.00	5.98	○	○
20	4.50	6.48	○	○
22	5.00	6.98	○	○
24	5.50	7.48	○	○
26	6.00	7.98	○	○
28	6.50	8.48	○	○
30	7.00	8.98	○	○
32	7.50	9.48	○	○
34	8.00	9.98	○	○
36	8.50	10.48	○	○
38	9.00	10.98	○	○
40	9.50	11.48	○	○
42	10.00	11.98	○	○
44	10.50	12.48	○	○
46	11.00	12.98	○	○
48	11.50	13.48	○	○
50	12.00	13.98	○	○
52	12.50	14.48	○	○
54	13.00	14.98	○	○
56	13.50	15.48	○	○
58	14.00	15.98	○	○
60	14.50	16.48	○	○
62	15.00	16.98	○	○
64	15.50	17.48	○	○
66	16.00	17.98	○	○
68	16.50	18.48	○	○
70	17.00	18.98	○	○
72	17.50	19.48	○	○
74	18.00	19.98	○	○
76	18.50	20.48	○	○
78	19.00	20.98	○	○
80	19.50	21.48	○	○
82	20.00	21.98	○	○
84	20.50	22.48	○	○
86	21.00	22.98	○	○
88	21.50	23.48	○	○
90	22.00	23.98	○	○
100	24.50	26.48	○	○
110	27.00	28.98	○	○
120	29.00	30.98	○	○

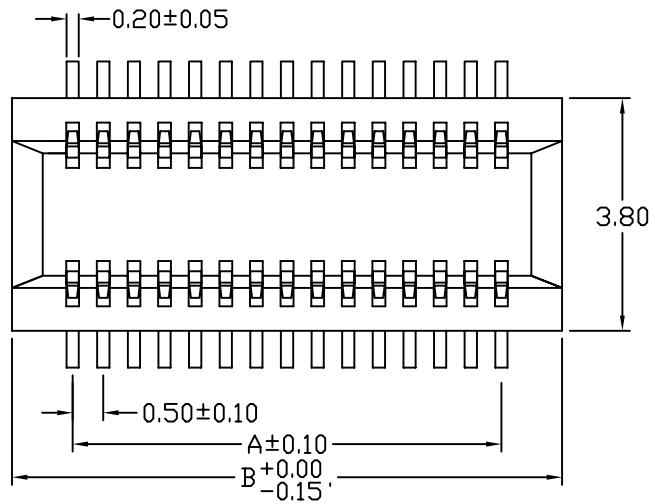

RECOMMEND P.C.B. LAYOUT(S=4/1)

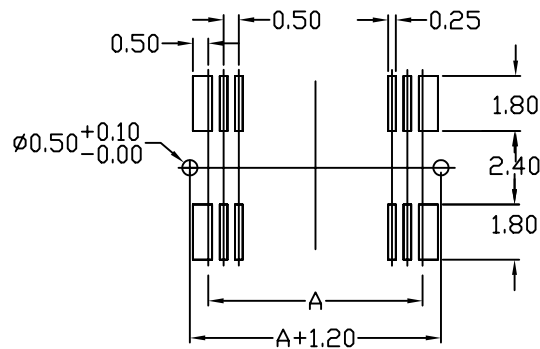

MORE THAN ALL
CONNECTORS ASSEMBLIES

煜倫有限公司

PART NO. ZV-S10-xxx

DWG NO. ZV-S10-xxx

FILE NO. FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.25
.XX ± 0.25
.XXX ± 0.25
AWG

DESCRIPTION: 0.5mm BOARD TO BOARD

AREA

REVISIONS

HK

DATE