



Notes: (Unless Otherwise Specified)


1. Waterproof Rate: IP67.
2. Suitable Cable $\varnothing$ D=5.0mm To 6.0mm.
3. Recommend Housing Torque: 6~7 Kgf-cm.
4. Recommend Gland Nut Torque: 9~10 Kgf-cm.
5. RoHS Compliant.

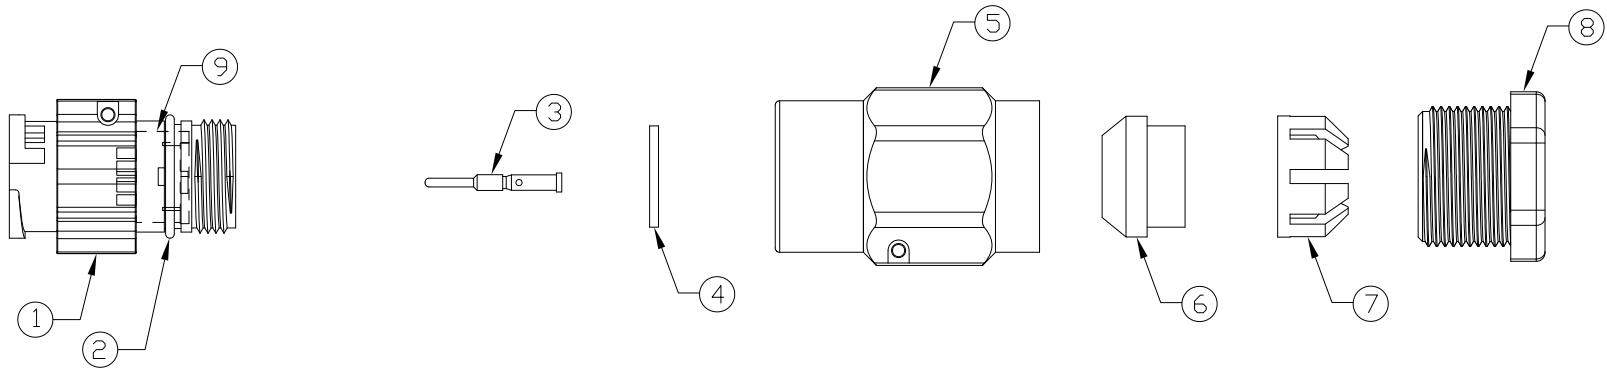

10	Gland Pin	Thermoplastic Color: Black	1
9	Base	Thermoplastic Color: Black	1
8	Gland Nut	Thermoplastic Color: Black	1
7	Cage	Thermoplastic Color: White	1
6	Gland	Silicone Color: Green	1
5	Cover	Thermoplastic Color: Black	1
4	Gasket	Silicone Color: Black	1
3	Contacts	Copper Alloy Finish: Au Plated	4
2	O-Ring	Silicone Color: Red	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



Pin Assignment

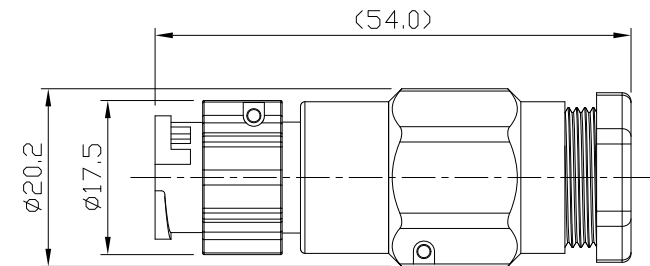

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

WPC15-PABK-04N-LF

SERIES

LEADFREE
SNAP/ON
04 WAY
BLACK
ASSEMBLY
MALE

DESCRIPTION: C2 5A 4P Field Installable Cable To Cable Male Crimp Lock