


Notes: (Unless Otherwise Specified)




1. Waterproof Rate: IP68.

2. Recommend Panel Thickness: 0.8 to 2.5 mm.


3. Recommend Torque: 19.0~20.0 Kgf-cm.



Pin Assignment

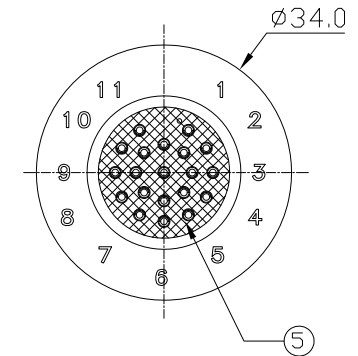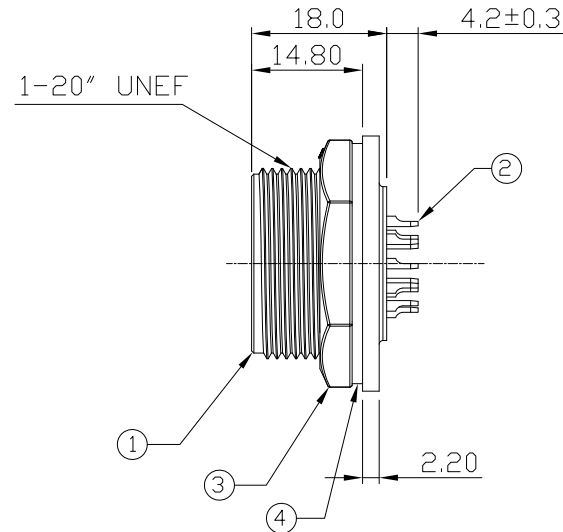

5	Glue	Epoxy Color: Black	
4	Gasket	Silicone Color: Black	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Contacts	Copper Alloy Finish: Au Plated	20
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



Recommend
Panel Cut-Out

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

WPC23-PSPBNWBK-20N-LF

SERIES
MALE
SOLDER
PANEL
BACK
BLACK
WASHER
NUT
LEADFREE
SNAP/ON
20 WAY

DESCRIPTION: C4 2A 20P Panel Male Solder Scr