



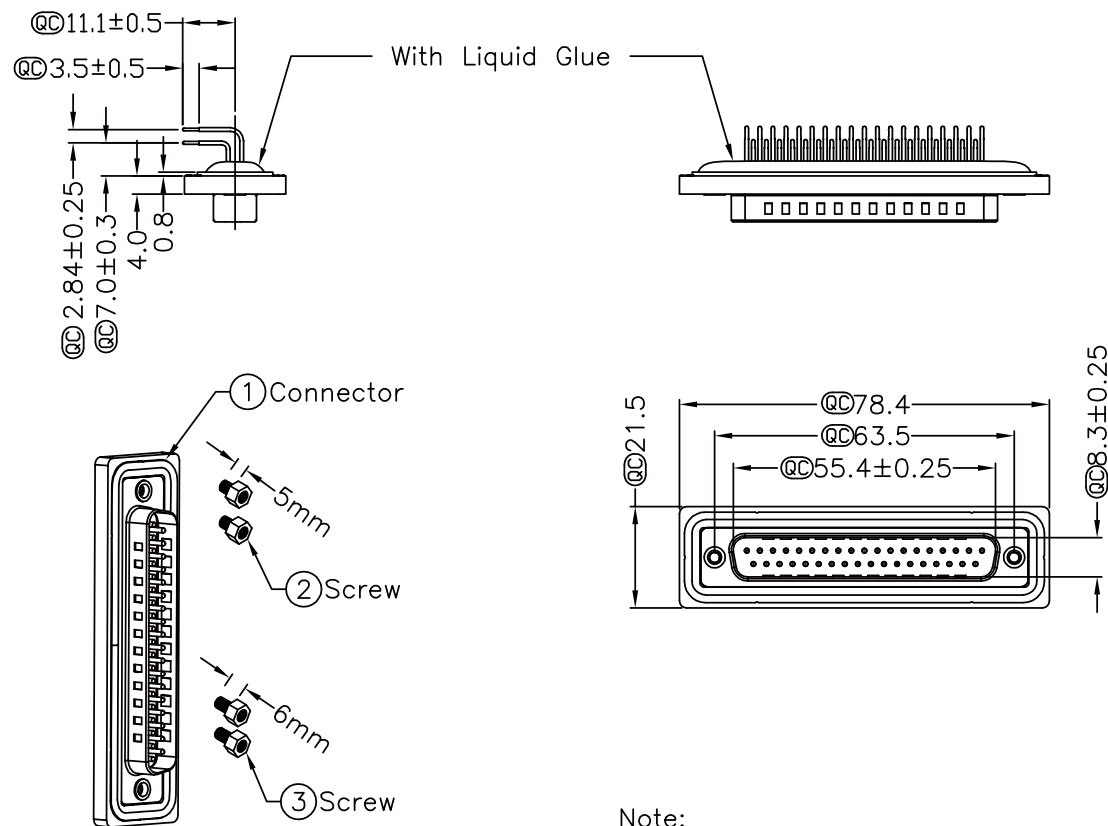

Note:

- * @C Important Dimension.
- * Waterproof Rate : IP67
- * Do Mating Test After Glued
點膠後, 須作對插測試
- * D-SUB Conn. : Black Core,PBT
- * Plastic Jacket : Black,Nylon+GF
- * Male Pin : Copper Alloy , Gold Plated
- * Ring : Light Blue,Silicone
- * Screw : Copper Alloy,Nickel Plated,#4-40 UNC

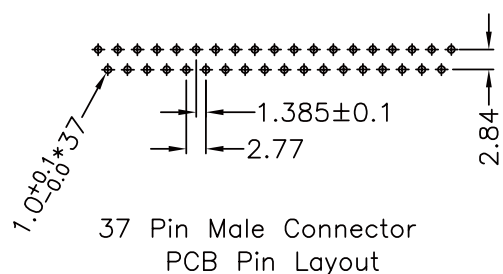


37 Pin Male Connector
PCB Pin Layout



Screw L=5.0 For Panel Thickness
Under 1.2mm
適用板厚為1.2mm以下

Screw L=6.0 For Panel Thickness
Between 1.2~2.0mm
適用板厚為1.2~2.0mm

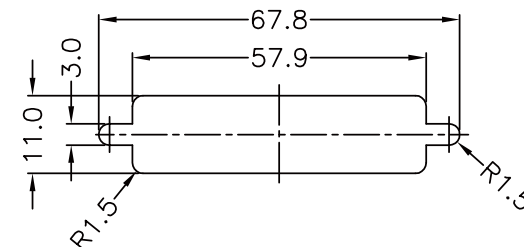

Recommended Panel Cut-Out
建議挖孔尺寸

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

WPDB-PRNH-37-LF

SERIES
LEADFREE
37WAY
HEX SCREW
NUT
DIP 90°
MALE

DESCRIPTION: D-Sub Conn. 37 Pins PCB Type
Panel Screw DB37P M Conn M Pin