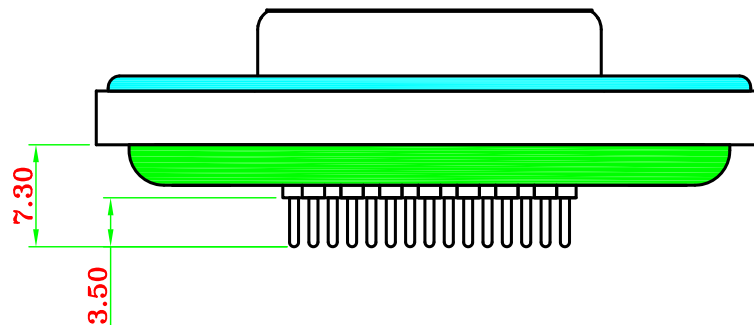
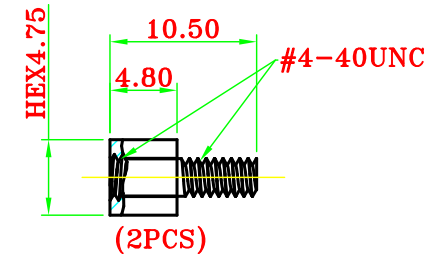
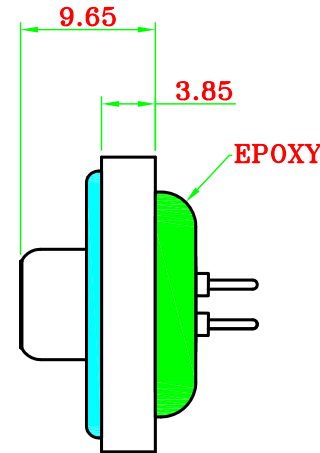
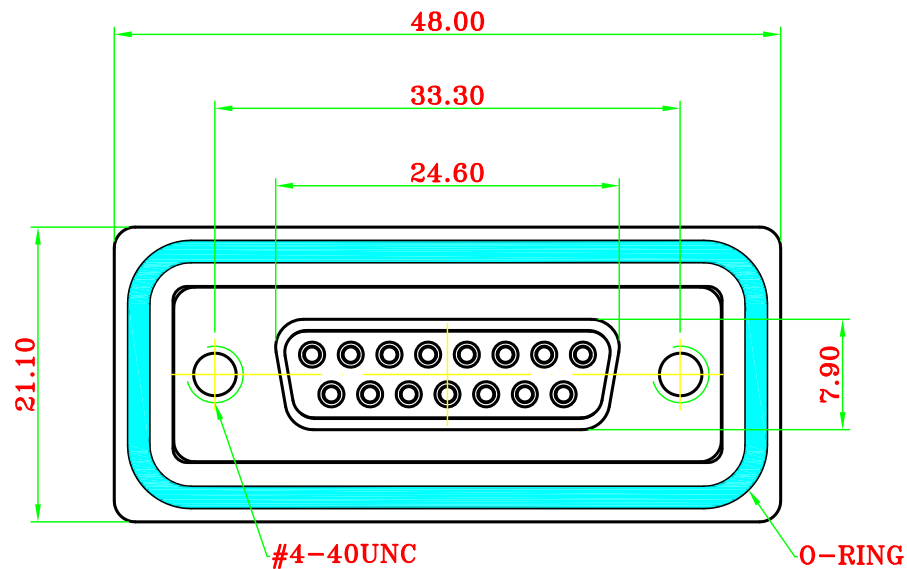


PCB LAYOUT

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED

INSULATOR : PBT GF, UL 94V-0 , BLACK COLOR

SIGNAL CONTACT : COPPER ALLOY, GOLD FLASH

METAL WATERTIGHT FRAME : PBT GF, UL 94V-0 , BLACK COLOR

O-RING : SILICONE

EPOXY SEALANT : EPOXY

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 5.0 A

SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V FOR 1 MINUTE

INSULATION RESISTANCE : 5GΩ MIN.

TEMPERATURE RATING : -25°C ~ +85°C

DEGREE OF PROTECTION : IP67 ACCORDING TO IEC60529

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.40

.X, ± 0.30

.XX, ± 0.20

.XXX, ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

WPDB-SDNH-15-LF

SERIES
LEADFREE
15 WAY
HEX SCREW
NUT
DIP180°
FEMALE

DESCRIPTION: