

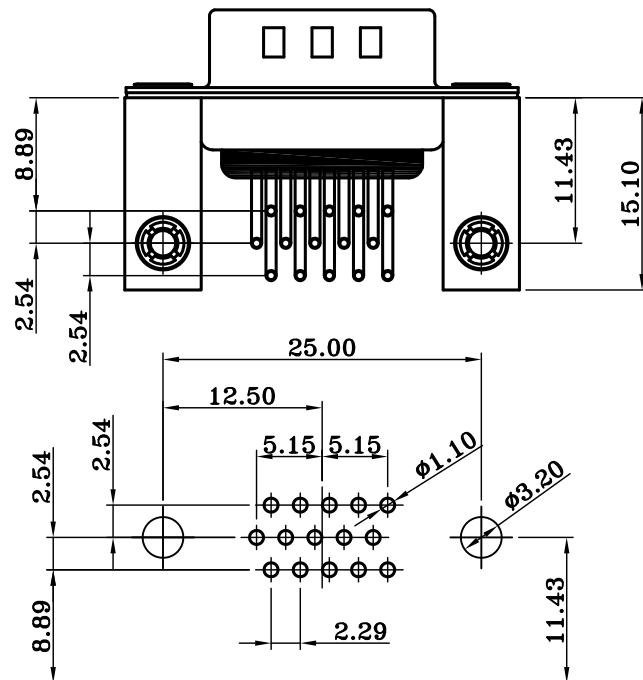


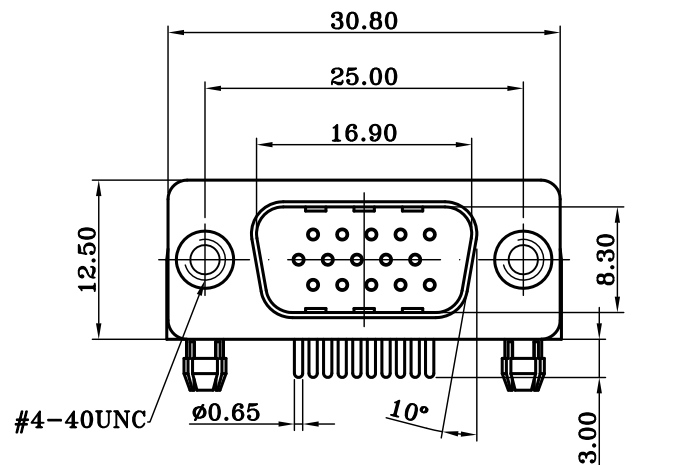

P.C.B LAYOUT

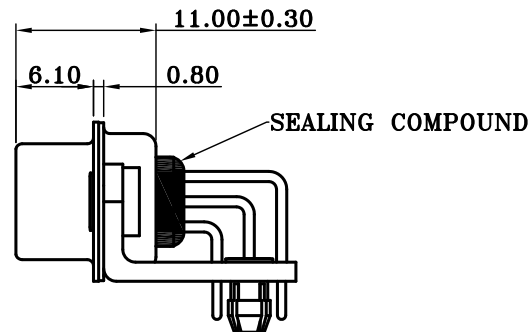

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
 BACK SHELL TIN FINISHED
 DIMPLES ON PLUG ONLY
 INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
 UL 94V-0 RATED, BLACK COLOR
 CONTACTS: PRECISION MACHINED COPPER ALLOY
 FULL GOLD FLASH
 SEALING COMPOUND : EPOXY

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 3.0 A
 CONTACT RESISTANCE : 10 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
 INSULATION RESISTANCE : 5GΩ MIN.
 TEMPERATURE RATING : -25°C ~ +85°C
 DEGREE OF PROTECTION : IP67 ACCORDING TO IEC60529

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ± 0.40

.X, ± 0.30

.XX, ± 0.20

.XXX, ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

WPHD-PRZN-15-LF

SERIES

MALE

NUT

CLIP

DIP 90°

LEADFREE

15 WAY

DESCRIPTION: