
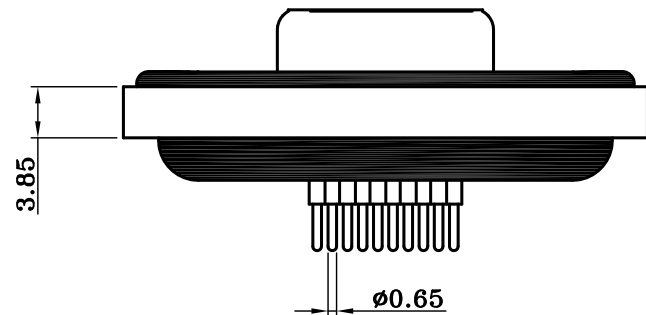
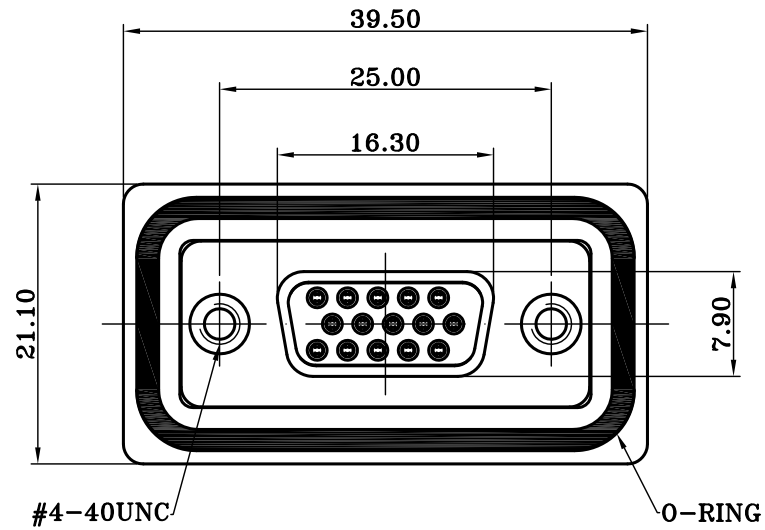
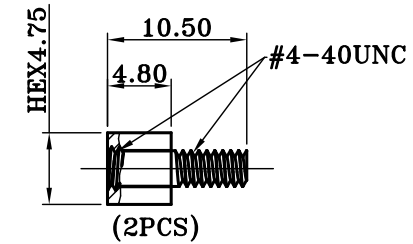


P.C.B LAYOUT

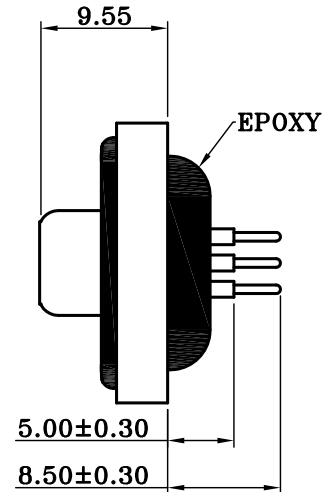

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, NICKEL FINISHED
 INSULATOR : PBT GF, UL 94V-0 , BLACK COLOR
 WATERTIGHT FRAME : PBT GF, UL 94V-0, BLACK COLOR
 O-RING : SILICONE
 SEALING COMPOUND : EPOXY
 HEXLOCKING SCREW : COPPER ALLOY
 SIGNAL CONTACT : COPPER ALLOY, FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 3.0 A
 SIGNAL CONTACT RESISTANCE : 10 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000 V FOR 1 MINUTE
 INSULATION RESISTANCE : 5GΩ MIN.
 TEMPERATURE RATING : -25°C ~ +85°C
 DEGREE OF PROTECTION : IP67 ACCORDING TO IEC60529

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY	X. ± 0.40
CHECKED BY GENIUS	.X ± 0.30
UNIT / mm	.XX ± 0.20
SCALE 1 : 1	.XXX ± 0.10
DATE	ANG ± 5°

SIZE A4 PPROJECTION

ORDER INFORMATION

WPHD-SDH-15-LF
 SERIES | | LEADFREE
 | | 15WAY
 | | HEX SCREW
 | | DIP 180°
 | | FEMALE

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com