



Notes: (Unless Otherwise Specified)


1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 5.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap
5. RoHS Compliant.

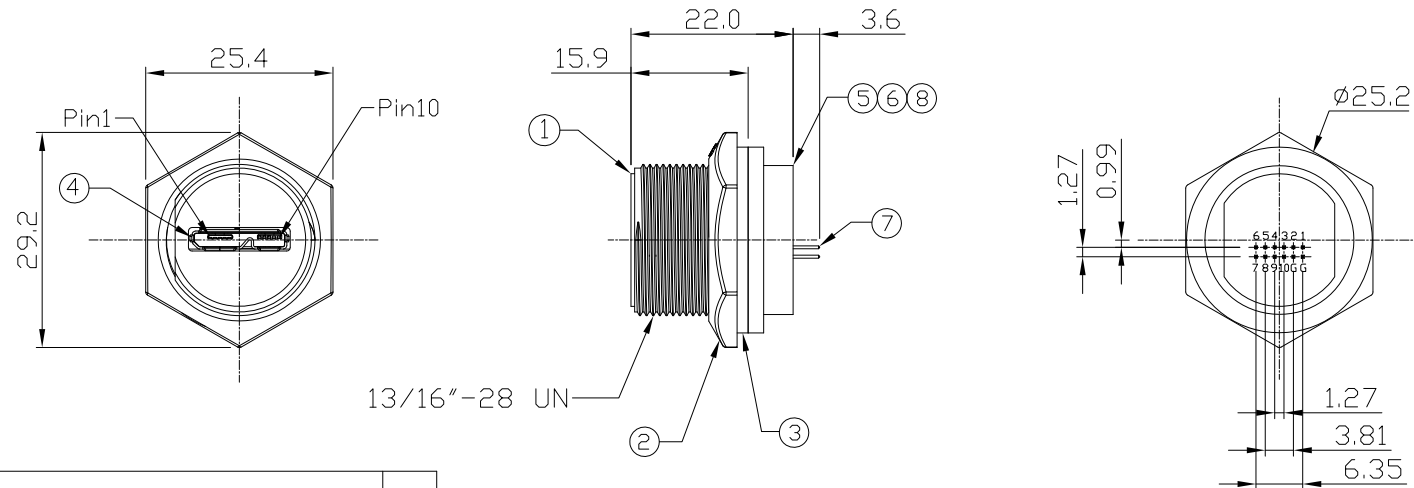

8	Hold	Silicone Color: Black	1
7	Pin Header	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated	1
6	Glue	Epoxy Color: Black	
5	PCB	FR-4 Color: —	1
4	Micro USB-B 3.0 Receptacle	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Copper Alloy, Finish: Ni Plated	1
3	Gasket	Silicone Color: Black	1
2	Hex Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



Recommend
Panel Cut-Out

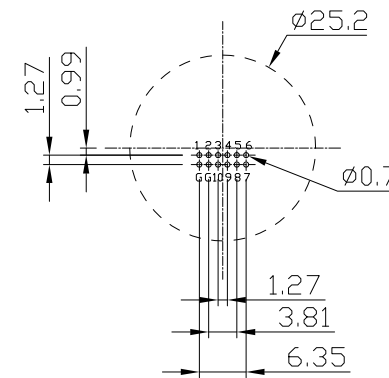

Recommend
PCB Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

WPMIB-SDPBNBKM-10B-LF

SERIES FEMALE DIP 180° PANEL BACK
LEADFREE 10 PIN B TYPE
METRIC ON BLACK RING NUT

DESCRIPTION: Micro USB-B 3.0 Plastic C3 Panel Jack Screw Dip