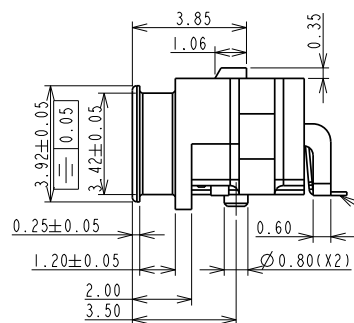
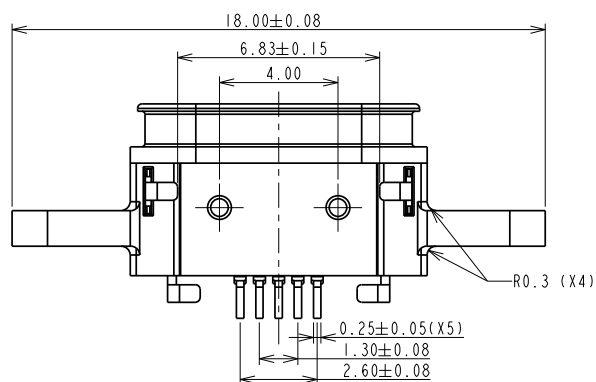
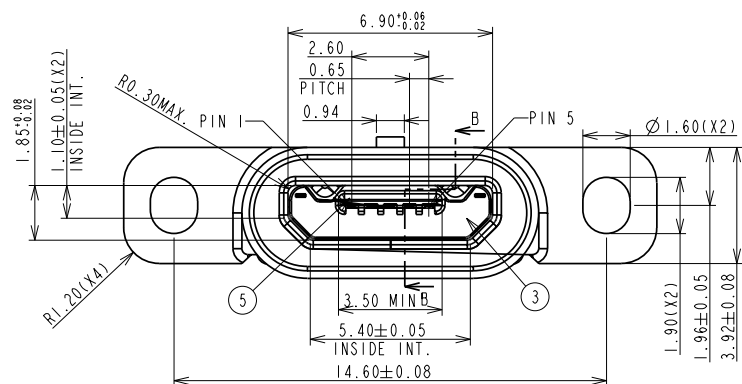
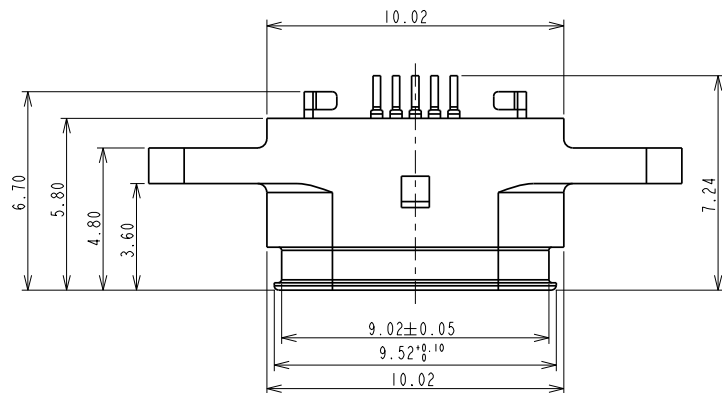


6	CONTACT	5	C7025/Au PLATING
5	BACK SHELL	1	SUS304-1/2H ULTRASONIC WAVE WASHING
4	HOLE DOWN	2	SUS304-1/2H /TIN PLATING ON ZHE SOLED AREA
3	I/M HOUSING	1	LCP E130; UL 94V-0/BLACK
2	SHELL	1	STAINLESS STEEL/TIN PLATED
1	HOUSING	1	PA9T/UL94-V0/BLACK
ITEM	NAME	Q'TY	MATERIAL / FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13

DATE

.XXX ± 0.05

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

WPMIB-SWE1-5B-LF

SERIES


LEADFREE
5 PIN B TYPE

EAR
90°SMT
FEMALE


煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MICRO USB WATER PROOF CONNECTOR RECEPTACLE B TYPE

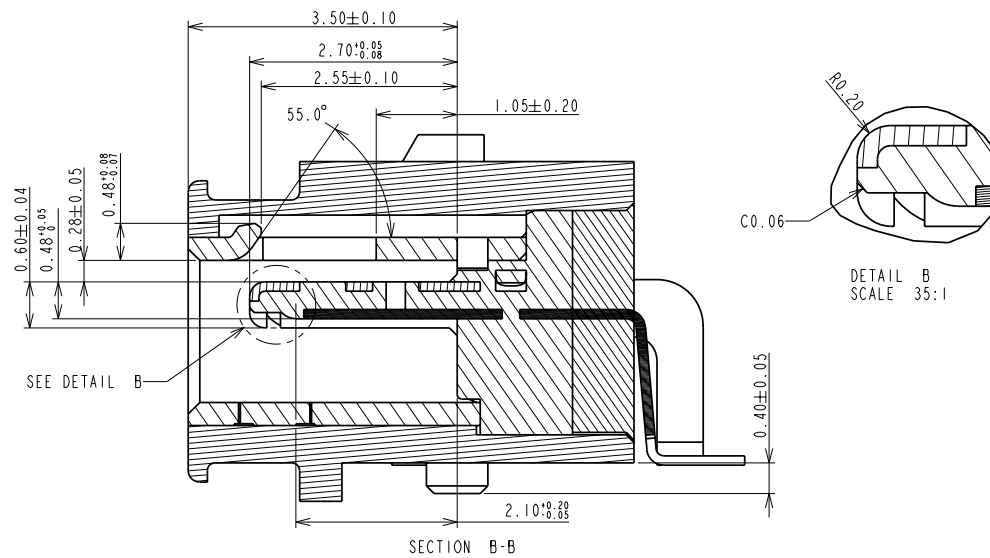

- NOTE:
- 1.0 Electrical Specification:
 - 1.1 Contact Resistance:
 - Initial: 30mΩ Maximum
 - After Durability: Change(detail) of +10mΩ.
 - 1.2 Isolation resistance:
 - Initial: 100MΩ Minimum.
 - After testing: 100MΩ Minimum.
 - 1.3 Dielectric withstanding Voltage:
 - 100V AC for one minute.
 - 1.4 Rated voltage: AC30V
 - Rated current: 3A/pin(1,5 pin.); 0.5A/pin(2,3,4pin.)
 - 2.0 Mechanical Specification:
 - 2.1 Mating Force:
 - Initial: 6-12N.
 - After durability: 6-12N.
 - 2.2 Unmating Force:
 - Initial: 8-15N.
 - After Automatic durability: 8-15N.
 - 2.3 Durability:
 - 10000 cycles (rated: 12.5mm/m).
 - 3.0 The dimension specified in () is only for reference.
- Please refer to the test result for the conductivity

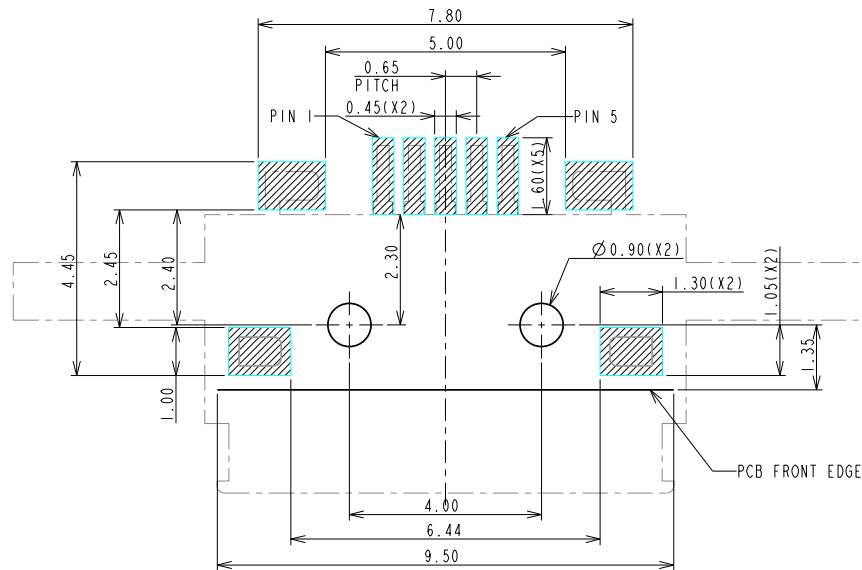

RECOMMENDED PCB LAYOUT TOLERANCE $\pm 0.05\text{mm}$.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.38

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.13

DATE

.XXX ± 0.05

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

WPMIB-SWE1-5B-LF

SERIES

LEADFREE
5 PIN B TYPE
EAR
90°SMT
FEMALE

DESCRIPTION: MICRO USB WATER PROOF CONNECTOR RECEPTACLE B TYPE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com