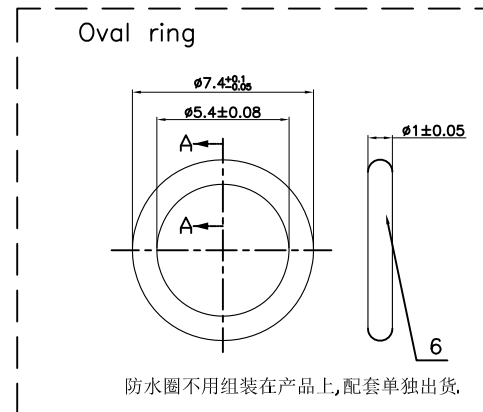
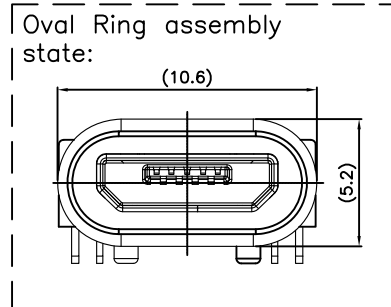
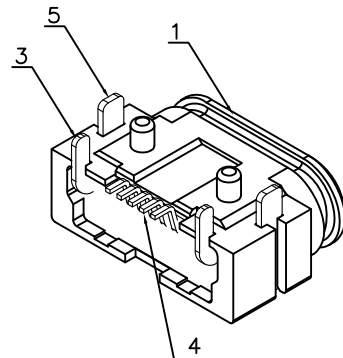
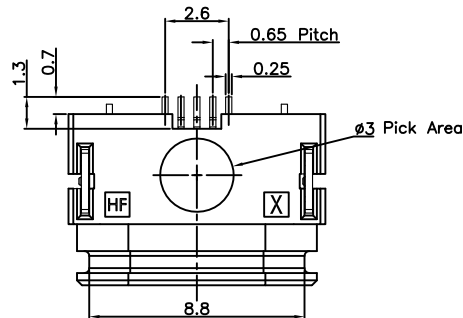


RECOMMENDED PCB LAYOUT

Tolerance: ±0.05mm

NOTE:
MATERIALS AND FINISHED
1.COVER: PA9T+30% G.F BLACK(UL94V-0)
2.HOUSING: LCP+30% G.F BLACK(UL94V-0)
3.SHELL: SUS304 NICKEL PLATING OVER ALL
4.TERMINAL: COPPER ALLOY, GOLD PLATED CONTACT AREA
TIN PLATED SOLDER AREA
NICKEL PLATING UNDER OVER ALL
5.FIXED FOOT: COPPER ALLOY NICKEL PLATING OVER ALL
6.WATERPROOF GASKET: SILICONE
ELECTRICAL CHARACTERISTICS
CURRENT RATING: 1.8A (PIN1/5), 0.5A (PIN2/3/4)
VOLTAGE RATING: 30V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30mΩ MAX
INSULATION RESISTANCE: 100MΩ MIN AT 500V DC
OPERATION TEMPERATURE: -30°C~+80°C
MATING/UNMATING CYCLES: 10000CYCLES
MAX PROCESSING TEMP: 260°C FOR 10s
WATER PROOFNESS: THIS PRODUCT IS BASER ON IPX7(1M, 30Min)

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

WPMIB-SWXMMMP-5B-LF
SERIES | | | | LEADFREE
5 PIN B TYPE
POST
METAL FOOT
FEMALE | NON EAR
90°SMT

DESCRIPTION: MICRO USB B TYPE, PCB MOUNT, SMT+DIP TYPE, METAL SHIELD, FEMALE WATERPROOF

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±