

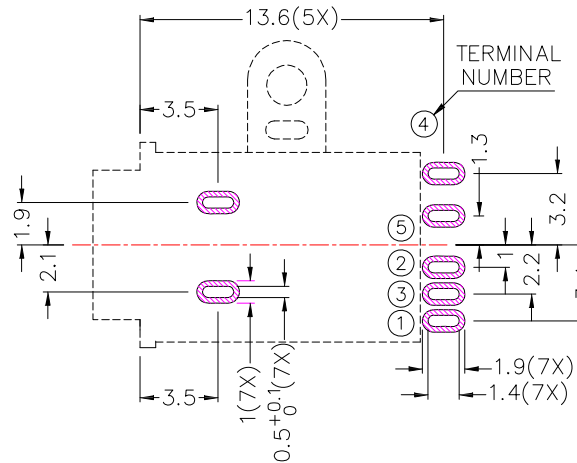
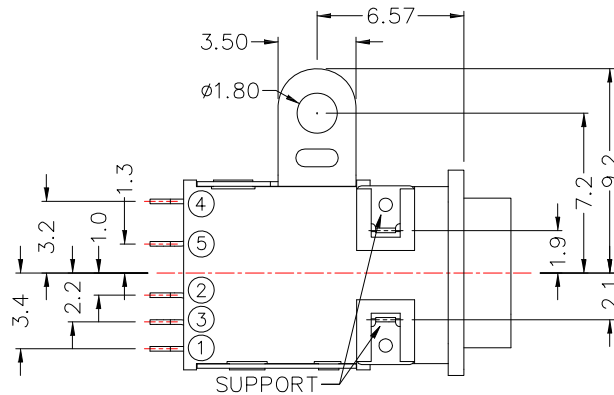

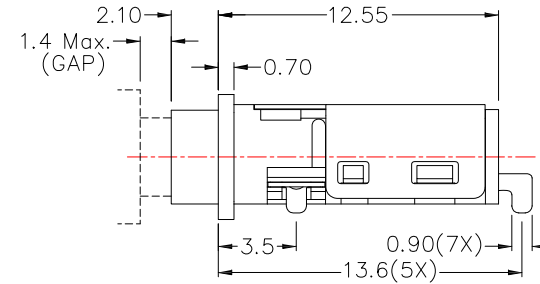
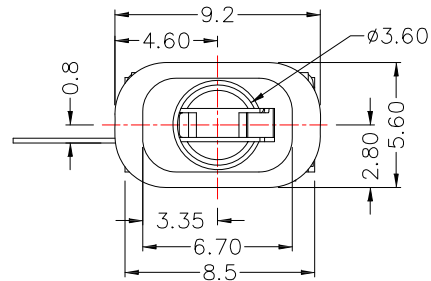


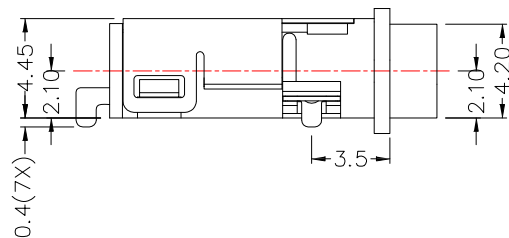

RECOMMENDED
SOLDER PAD LAYOUT
(TOP VIEW)

SPECIFICATION

1. Rating : DC 12V 1.0A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles
7. Waterproof Level: IPX7



MODEL NO.	WPPN-JRME1-05D
SCHEMATIC	

8	HOUSING	1	PA10T	
7	SHIELD	1	SUS	
6	SUPPORT	1	BRASS	Ag-Plating
5	5# CONTACT FOOT	1	COPPER ALLOY	Au-Plating
4	4# CONTACT FOOT	1	COPPER ALLOY	Au-Plating
3	3# CONTACT FOOT	1	COPPER ALLOY	Au-Plating
2	2# CONTACT FOOT	1	COPPER ALLOY	Au-Plating
1	1# CONTACT FOOT	1	COPPER ALLOY	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

WPPN-JRME1-05D-LF

SERIES
LEADFREE
5P4C
EAR
METAL
DIP 90°
JACK

DESCRIPTION: 3.5mm PHONE JACK 防水型

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

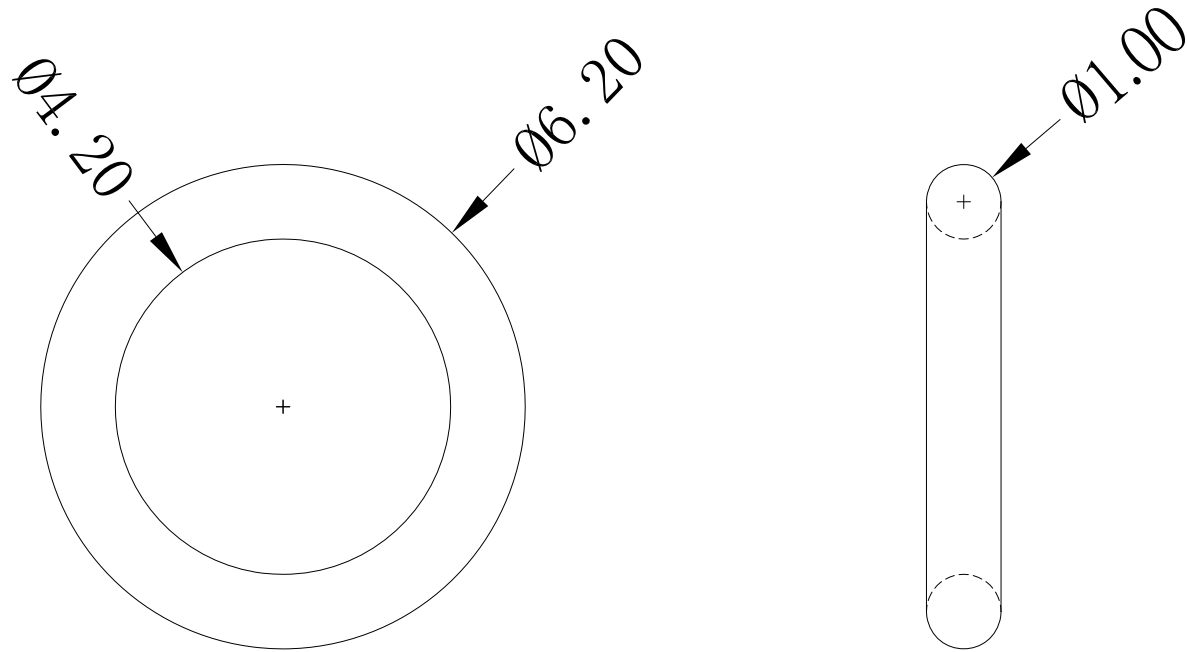

Material: Silicone,UL94V-0

Hardness: 70°

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

PPOJECTION

照片框

ORDER INFORMATION

WPPN-JRME1-05D-LF

SERIES

JACK

5P4C

EAR

METAL

DIP 90°

JACK

LEADFREE

DESCRIPTION: 3.5mm PHONE JACK 防水型 WATERPROOF O-RING