
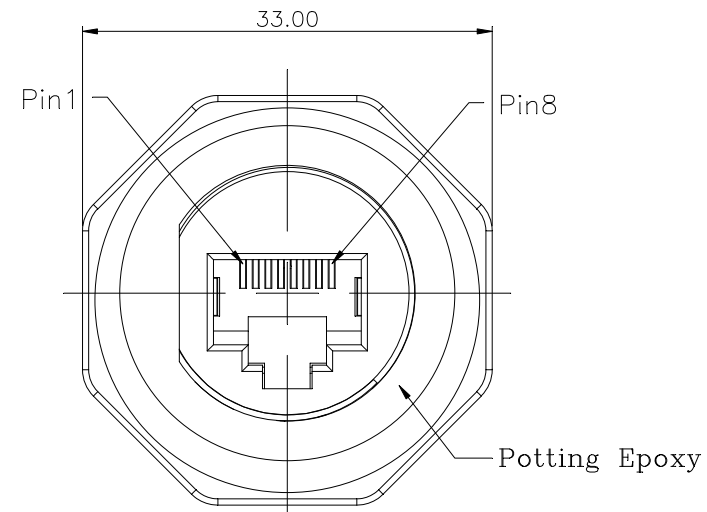
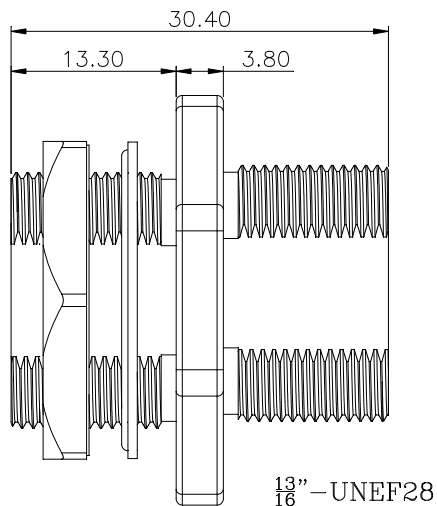


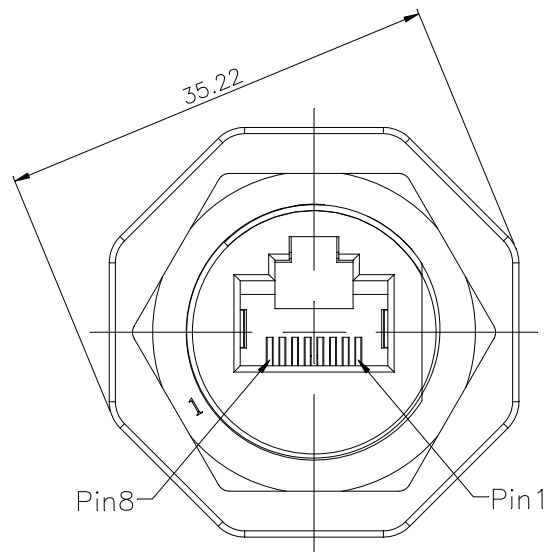

Electrical Specifications:

Meets EIA/TIA-568-B.2 Cat.6A Specification
 Contact Resistance: 100 mOhm max
 Insulation Resistance: 500 MOhm min @100V DC
 DWV: 1000V AC/60s min Contact to Contact
 Operating Temperature: -40°C TO +80°C

NOTES:

1. MATERIAL:



1.1 HOUSING&Nut: ENGINEERING THERMOPLASTIC,
 UL94V-0, COLOR:BLACK.

1.2 CONTACTS: PHOSPHOR BRONZE.

1.3 Gasket: SILICON, COLOR:RED

2. FINISH:

2.1 CONTACTS: GOLD PLATING OVER NICKEL.

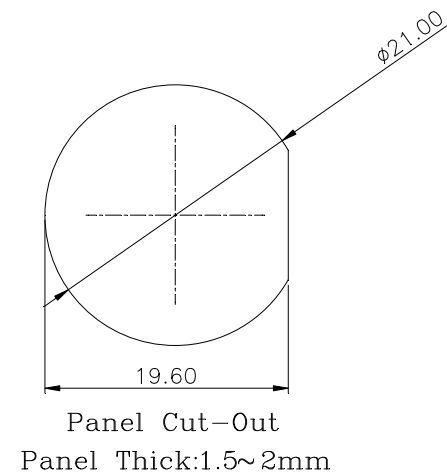

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.10
 ANG ± 3°


照片框

ORDER INFORMATION

WPRJX2-FAPBNWBKM-0808-LF

SERIES FEMALE ASSEMBLY
 NUT+WASHER
 BLACK
 METRIC SCREW
 8P8C
 LEADFREE
 PANEL BACK

DESCRIPTION: 防水接头(中繼接头)

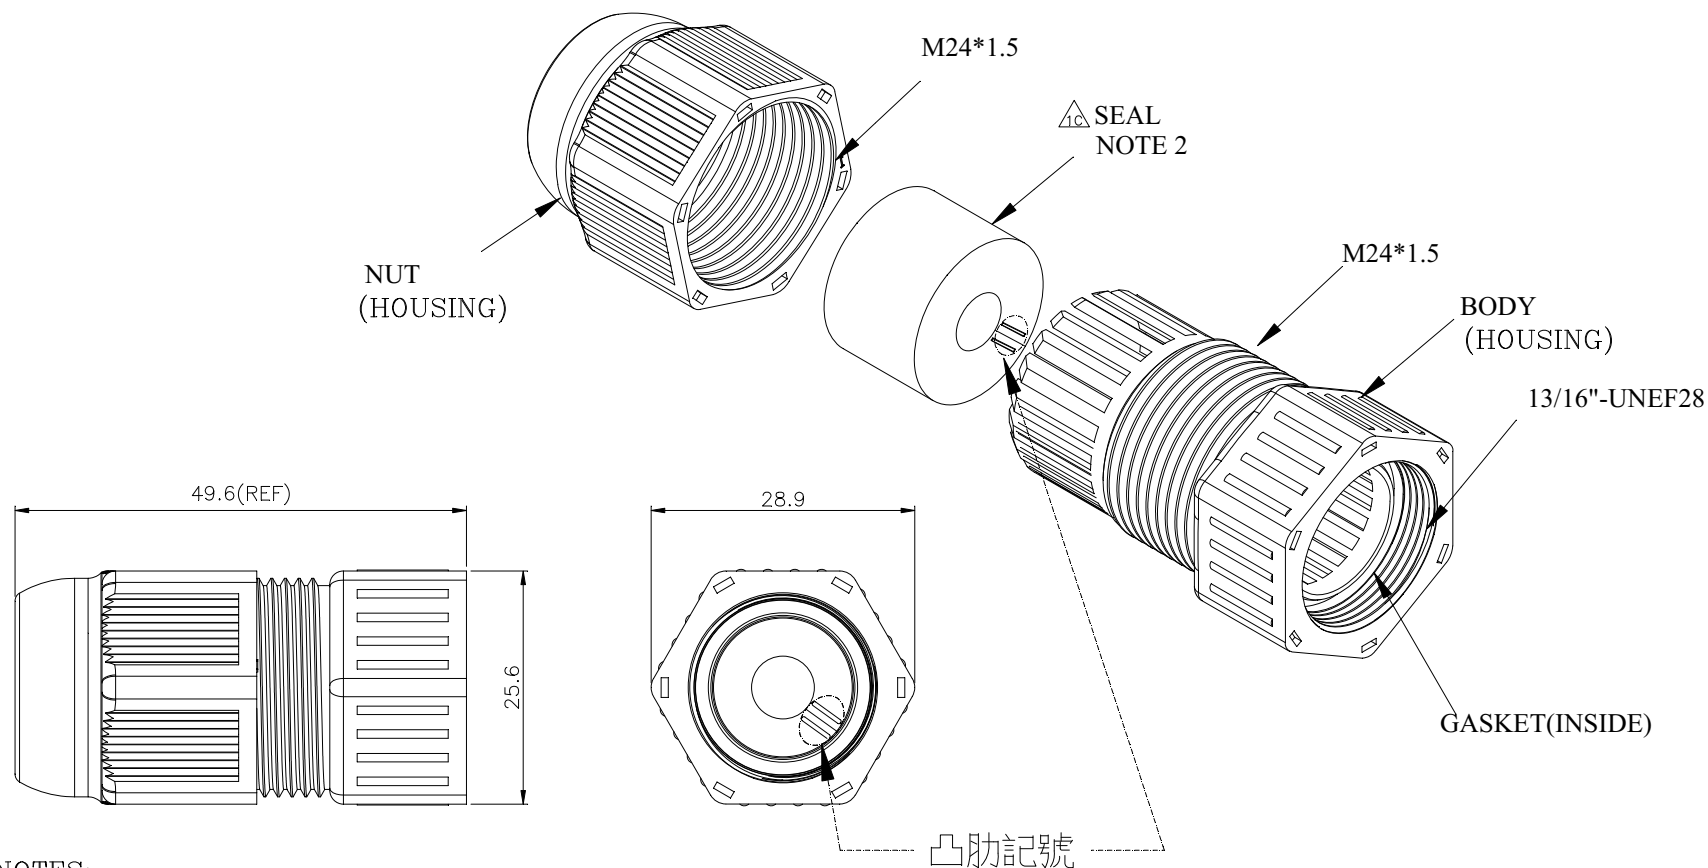

NOTES:

1. MATERIAL:

1.1 HOUSING: ENGINEERING THERMOPLASTIC,
UL94V-0, COLOR:BLACK.

1.2 SEAL: SILICON, COLOR:RED.

1.3 GASKET: SILICON, COLOR:RED.

2. APPLICABLE ETHERNET CABLE DIAMETER RANGE $\phi 7 \sim \phi 5.5$

3. $\triangle$ MARK FOR QUALITY CONTROL DEPARTMENT EXAMINE.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ± 0.50

.X, ± 0.38

.XX, ± 0.25

.XXX, ± 0.10

ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

WPRJX2-FAPBNWBKM-0808-LF

SERIES

FEMALE

ASSEMBLY

8P8C

METRIC SCREW

BLACK

NUT+WASHER

PANEL BACK

LEADFREE

DESCRIPTION: 防水接頭(中繼接頭)

P3353T0200
20 PCS/TRAY

灌膠面朝上

1. 請將組立完成之成品依圖面標示方向順序放入真空盤(P3353T0200)內。

(2.)

P3353T0100

P3353T0200

真空盤包裝完成

訂針位置(對稱四邊)

2. 成品依序放入真空盤後,再蓋好上蓋於真空盤,四邊用訂書機訂針完成。

(3.)

20 PCS/BAG
5號夾鍊袋
P01B105400

20 PCS/BAG
5號夾鍊袋
P01B105400

18 TRAYS/BAG
P01A109610

360 PCS/BOX
P18A111000

打包帶

封箱膠帶

正麥

製造完成標籤

側麥

3. 請將防水袋打開套入外箱內,再將裝訂真空盤放入外箱中,一層兩盤,再放入相同數量的盒端螺帽&墊片,一箱共360PCS,依圖示貼標籤,以封箱膠帶封箱,依圖示打包。
4. 若為不滿箱,請用牛皮紙填充。

附註:

1. 附備品時請用真空盤裝。
2. 尾數請用真空盤裝後再放置相同外箱內。

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.10

ANG $\pm 3^\circ$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

WPRJX2-FAPBNWBKM-0808-LF

SERIES

FEMALE

ASSEMBLY

LEADFREE

8P8C

METRIC SCREW

BLACK


NUT+WASHER

PANEL BACK

DESCRIPTION: 防水接頭(中繼接頭)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

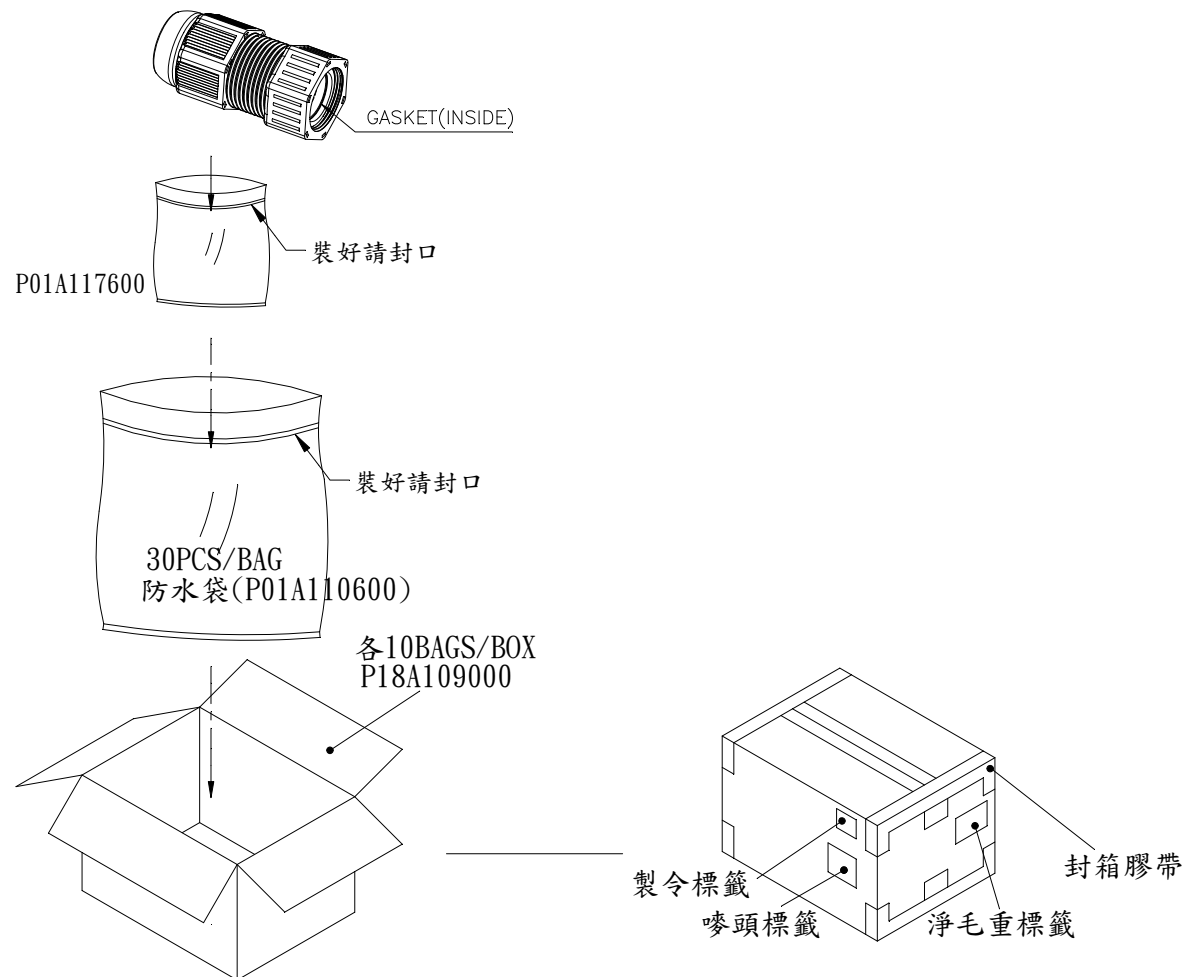

1. 將線端零件放進塑膠袋中後封口，外側貼上其料號，再將30PCS放入大塑膠袋中後封口，再放入防水袋(P01A109610)中，放入外箱(P18A109000)內，一箱共放300PCS，外箱請依圖示貼標籤，以封箱膠帶封箱，依圖示打包。

2. 若為不滿箱，請用牛皮紙填充。

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.38

.XX ± 0.25

.XXX ± 0.10

ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

WPRJX2-FAPBNWBKM-0808-LF

SERIES

FEMALE

ASSEMBLY

8P8C

BLACK

NUT+WASHER

PANEL BACK

METRIC SCREW

LEADFREE

DESCRIPTION: 防水接頭(中繼接頭)