

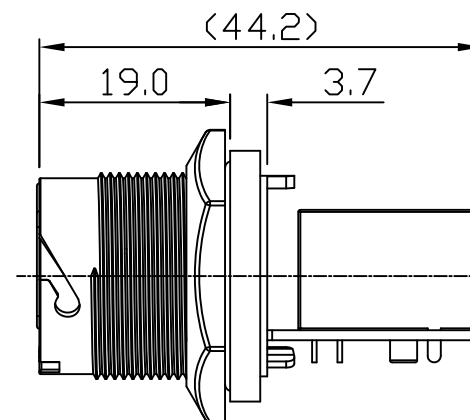
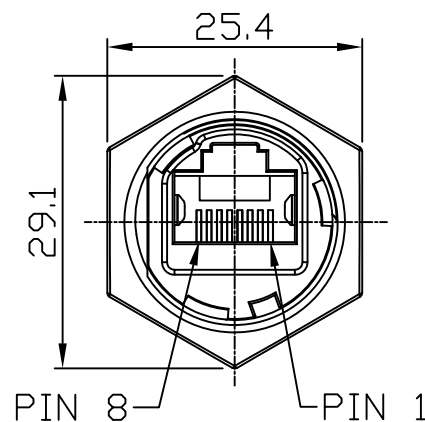


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. (QC) Critical Dimension.
2. Waterproof Rate : IP68.
3. Panel Thickness : 0.8 to 8.0 mm.
4. HEX Nut Torque: 5kgf-cm Tightening Torque.

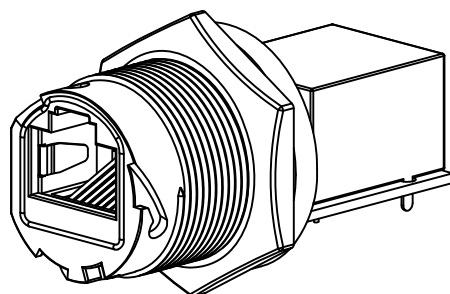

RJ45 SHIELDED		
Pin	Name	Function
1	TX D1+	TRANCEIVE DATA+
2	TX D1-	TRANCEIVE DATA-
3	RX D2+	RECEIVE DATA+
4	BI D3+	BI DIRECTIONAL DATA+
5	BI D3-	BI DIRECTIONAL DATA-
6	RX D2-	RECEIVE DATA-
7	BI D4+	BI DIRECTIONAL DATA+
8	BI D4-	BI DIRECTIONAL DATA-

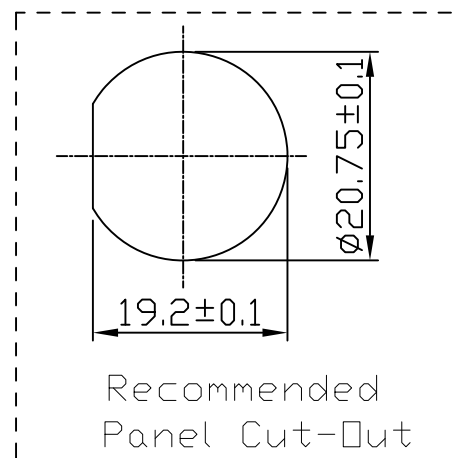

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

WRJX2-FAPBNW-0808-LF

SERIES

LEADFREE

8P8C

NUT+WASHER

PANEL BACK

ASSEMBLY

FEMALE

DESCRIPTION: