


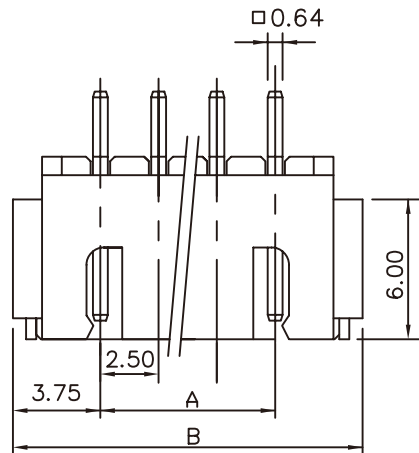



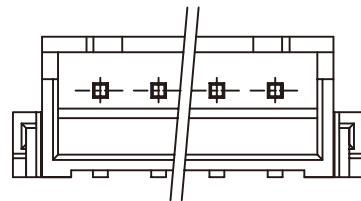

3P-16P

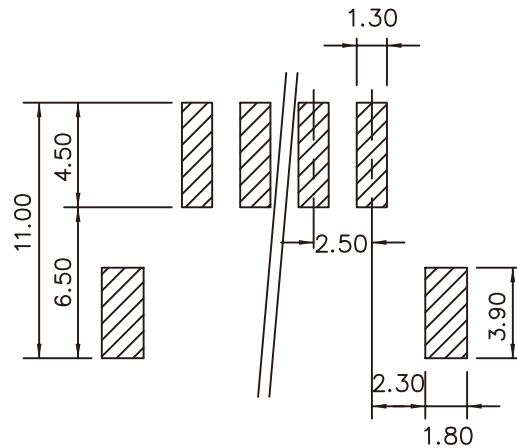

2P



Specifications

Current Rating: 3A AC, DC
Voltage Rating: 250V AC Maximum
Operating Temp: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin: Brass/Gold Flash
Wafer: Nylon 6T, UL94V-0
Solder Tab: Brass/Tin Plated

Poles	Dimension mm		Part No.	Note.
	A	B		
2	2.5	10.0	XH-W-02	
3	5.0	12.5	XH-W-03	
4	7.5	15.0	XH-W-04	
5	10.0	17.5	XH-W-05	
6	12.5	20.0	XH-W-06	
7	15.0	22.5	XH-W-07	
8	17.5	25.0	XH-W-08	
9	20.0	27.5	XH-W-09	
10	22.5	30.0	XH-W-10	
11	25.0	32.5	XH-W-11	
12	27.5	35.0	XH-W-12	
13	30.0	37.5	XH-W-13	
14	32.5	40.0	XH-W-14	
15	35.0	42.5	XH-W-15	
16	37.5	45.0	XH-W-16	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

XH-W-xx-LF
SERIES | LEADFREE
02~16WAY
90°SMT

DESCRIPTION: XH2.5mm Wire-to-Board Header SMT 90° Type