


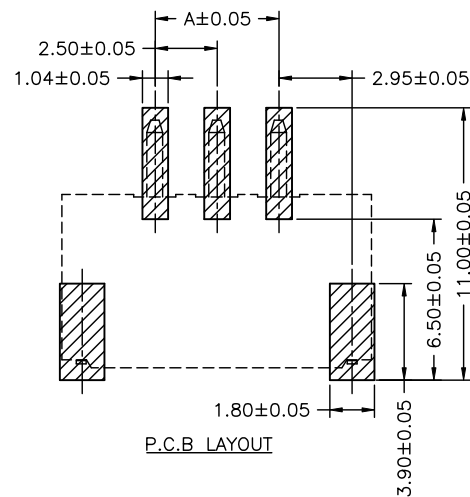







KAPTON TAPE
(FOR PICK AND
PLACE SYSTEMS)





02P~03P

SPECIFICATIONS

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass
Solder Tabs: Brass

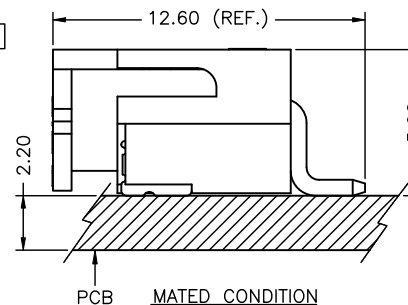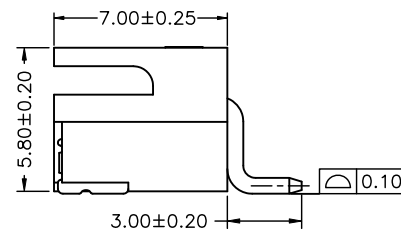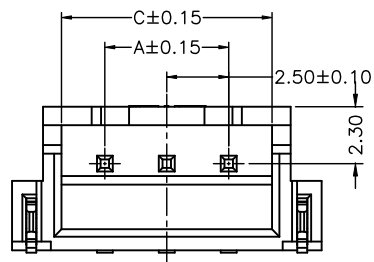

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	2.50	10.00	6.00	09P	20.00	27.50	23.50
03P	5.00	12.50	8.50	10P	22.50	30.00	26.00
04P	7.50	15.00	11.00	11P	25.00	32.50	28.50
05P	10.00	17.50	13.50	12P	27.50	35.00	31.00
06P	12.50	20.00	16.00	13P	30.00	37.50	33.50
07P	15.00	22.50	18.50	14P	32.50	40.00	36.00
08P	17.50	25.00	21.00	15P	35.00	42.50	38.50

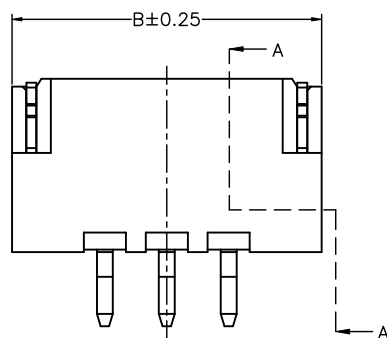

SEC:A-A

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION


照片框

ORDER INFORMATION






XH-WCR-xx-LF
SERIES REEL MYLAR 90°SMT
LEADFREE
02~15WAY

DESCRIPTION: 2.50mm PITCH 90° WAFER-SMT TYPE

02~04 Contacts

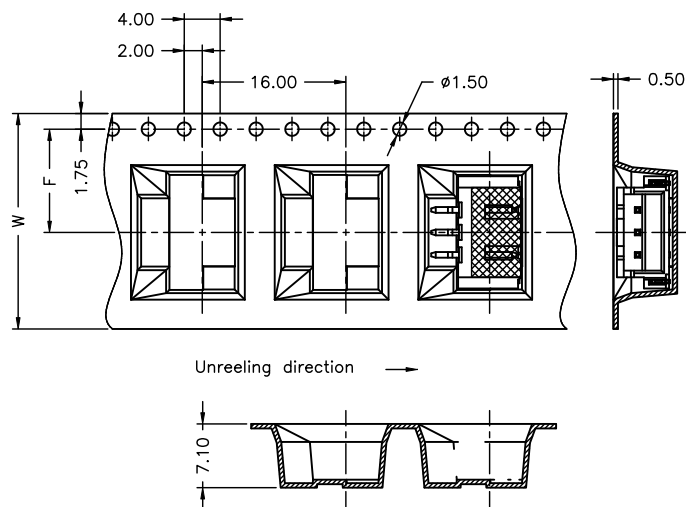

05~15 Contacts

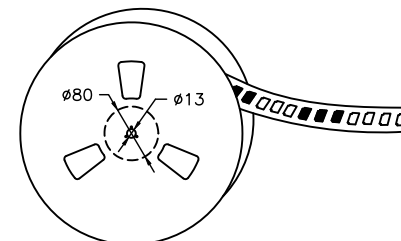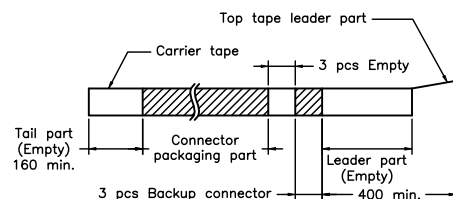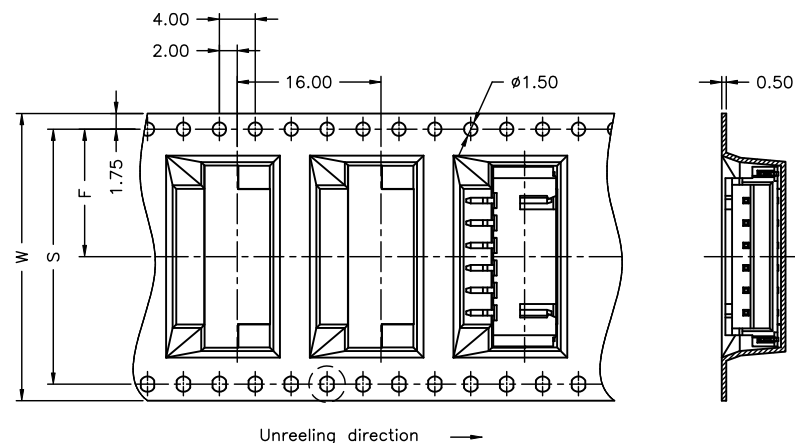

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	24	11.50		600
03P	24	11.50		600
04P	24	11.50		600
05P	32	14.20	28.40	600
06P	32	14.20	28.40	600
07P	44	20.20	40.40	600
08P	44	20.20	40.40	600
09P	44	20.20	40.40	600
10P	44	20.20	40.40	600
11P	44	20.20	40.40	600
12P	56	26.20	52.40	600
13P	56	26.20	52.40	600
14P	56	26.20	52.40	600
15P	56	26.20	52.40	600

NOTE:
Material: Transparent
Anti-static Polystyrene.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

XH-WCR-xx-LF
SERIES REEL MYLAR 90°SMT
LEADFREE 02~15WAY

DESCRIPTION: 2.50mm PITCH 90° WAFER-SMT TYPE