
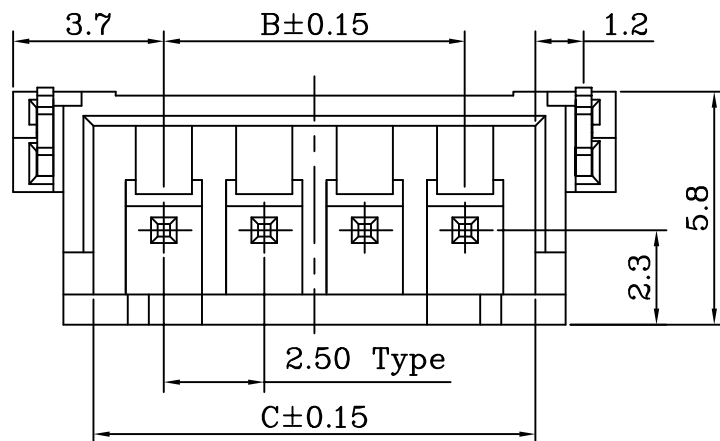
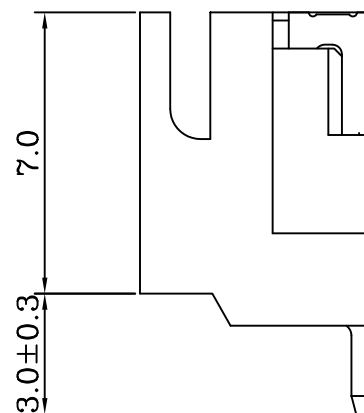


P.C. BOARD LAYOUT

NOTES:

1. MATERIAL :
BASE: NYLON 9T ,94V-0(NATURAL)
PIN: BRASS
PEG: BRASS
2. CIRCUITS : 2PIN ~ 15PIN.
3. INSERT : BRASS

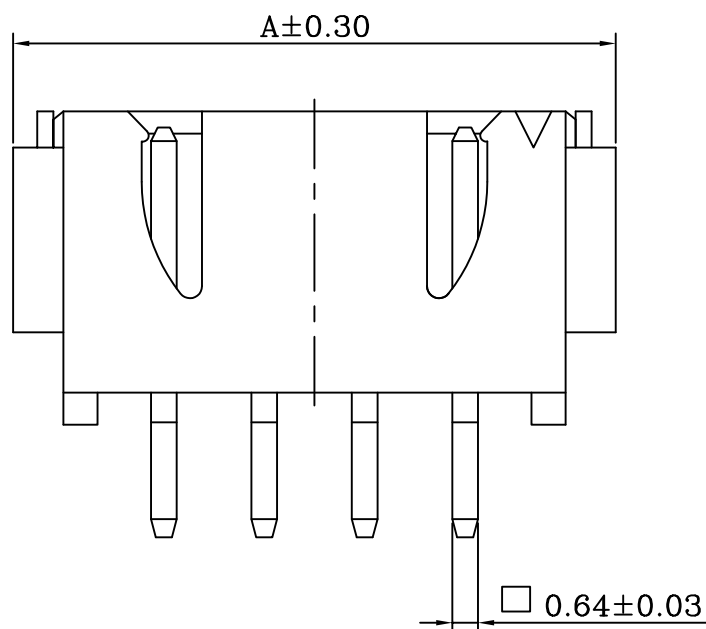

DIMENSIONS:

CIRCUITS	DIM. A	DIM. B	DIM. C
02	10.00	2.50	6.00
03	12.50	5.00	8.50
04	15.00	7.50	11.00
05	17.50	10.00	13.50
06	20.00	12.50	16.00
07	22.50	15.00	18.50
08	25.00	17.50	21.00
09	27.50	20.00	23.50
10	30.00	22.50	26.00
11	32.50	25.00	28.50
12	35.00	27.50	31.00
13	37.50	30.00	33.50
14	40.00	32.50	36.00
15	42.50	35.00	38.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.12
.XXX ± 0.08
ANG ±

PPOJECTION

照片框



ORDER INFORMATION

XH-WR-xx-LF
SERIES | LEADFREE
02~15WAY
REEL
90°SMT







DESCRIPTION:

TABLE.A TAPING REEL (BOM PER 13" REEL):


CIRCUITS	DIM.D	DIM.E	DIM.F
2 ~ 4 PIN	25.5	24.0	---
5 ~ 6 PIN	33.5	32.0	28.40
7 ~ 11 PIN	45.5	44.0	40.40
12 ~ 15 PIN	57.5	56.0	52.40

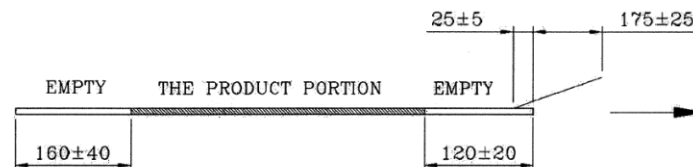

DETAIL "Y"

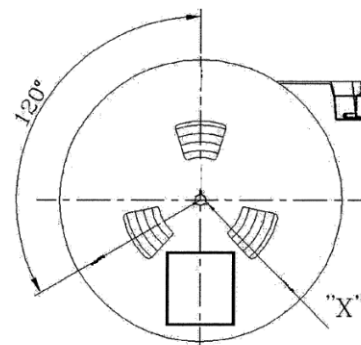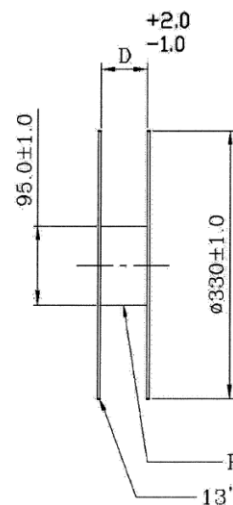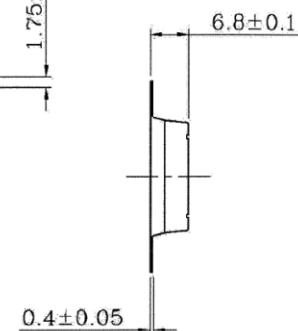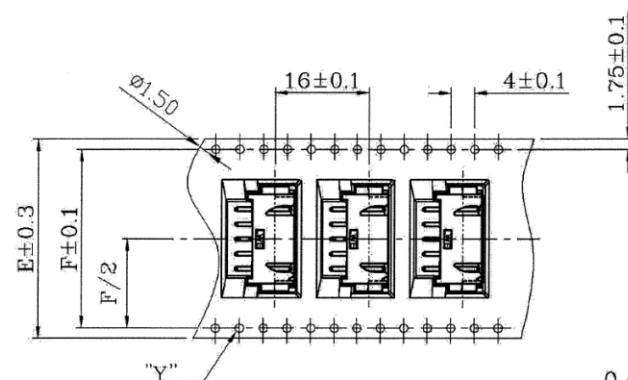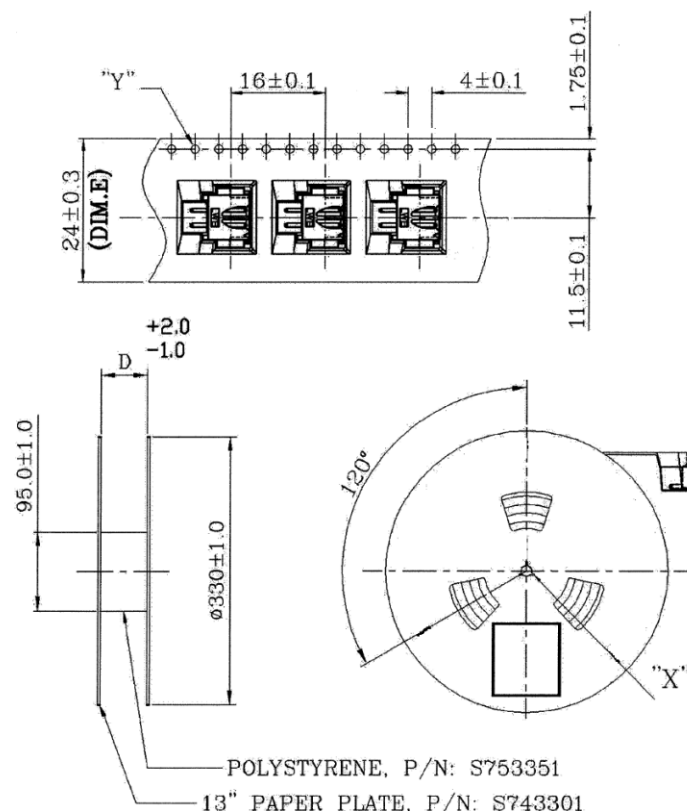

DETAIL "X"

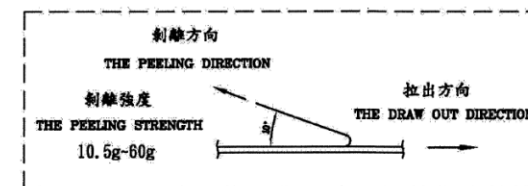

POLYSTYRENE, P/N: S753351

13" PAPER PLATE, P/N: S743301

- NOTES: 1.Pitch Tolerance Over Any 10 Pitch ± 0.20 .
 2.Material : PS Black-Thickness : 0.4 ± 0.05 .
 3.Component Load Per 13" Reel : 500 Pcs.
 4.All dimension meet EIA-481-B requirements.

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, $\pm$

CHECKED BY GENIUS

.X, $\pm$

UNIT / mm

SCALE 1 : 1

.XX, $\pm$.XXX, $\pm$ ANG, $\pm$

DATE

SIZE A4

PROJECTION

照片框

ORDER INFORMATION

XH-WR-xx-LF
 SERIES | LEADFREE
 02~15WAY
 REEL
 90°SMT

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com