

APPLICATION AND FEATURES


1. Compact and low profile design for saving space
2. High reliable contact with low insertion force.
3. Straight and right angle type facilitate engineering design.
4. Mate with flexible Printed Circuit.

SPECIFICATIONS

Current Rating
Insulator resistance

1 Amp
5000 Megohms min.
500v DC for 1 minutes.
20 m ohm Max.
AC 500 v for 1 minutes.
-40°C 105 C
Bronze
Polyester, UL 94v-0
standard P.B.T

Contact resistance
Dielectric withstanding
Operating Temperature
Contact Material
Insulator Material

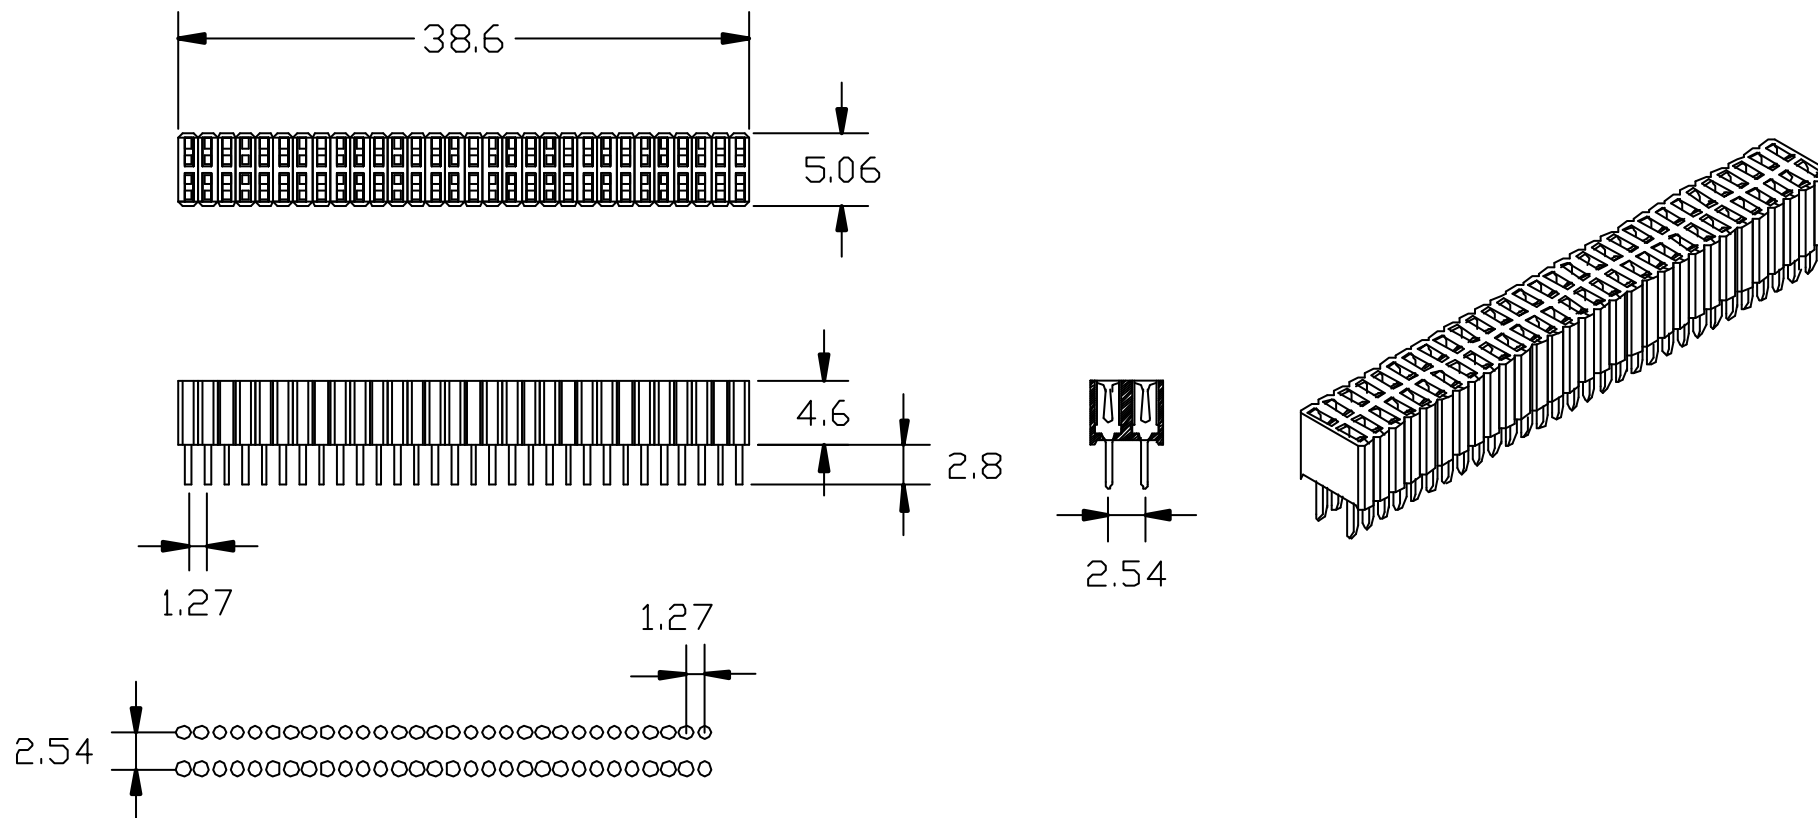

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

Y-D46-2X30-LF
SERIES LEADFREE
60 WAY
HIGH 4.6mm
DIP 180°

DESCRIPTION: 1.27*2.54mm Post Header Receptacle PCB Mount Vertical Type Dual Rows