


Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: - 40° ~ +85° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic.UL 94V-0
 Finish: Tin,Gold Plated
 Standard: Nylon-6T

Note:
 Duplex Plating: Gold Plated on contact area,
 Tin on solder area

Recommended P.C. Board SMD Layout

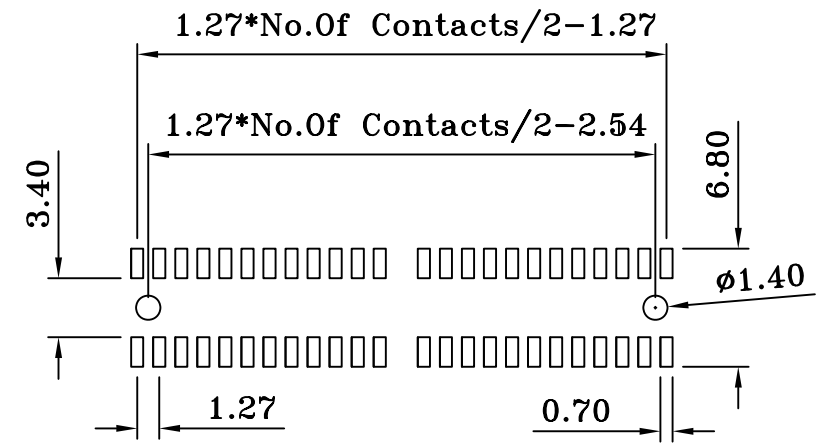

Y-V60PC-2Xxx-LF
 LEADFREE
 RoHS Compliant

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. Y-V60PC-2Xxx

DWG NO. Y-V60PC-2Xxx

FILE NO.

UNIT / mm SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:			
AREA	REVISIONS	HK	DATE

煜倫股份有限公司