


Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

Recommended P.C.Board Hole Layout

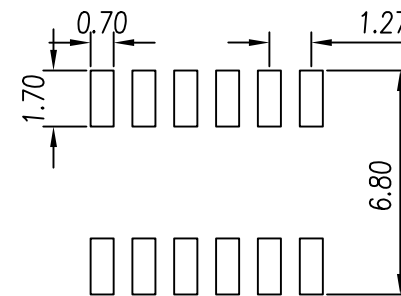

Y-V60XG10CR-2Xxx
 G10:FULLGOLD 10u" R:REEL
 C:CAP



PART NO. Y-V60XG10CR-2Xxx

DWG NO. Y-V60XG10CR-2Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

