

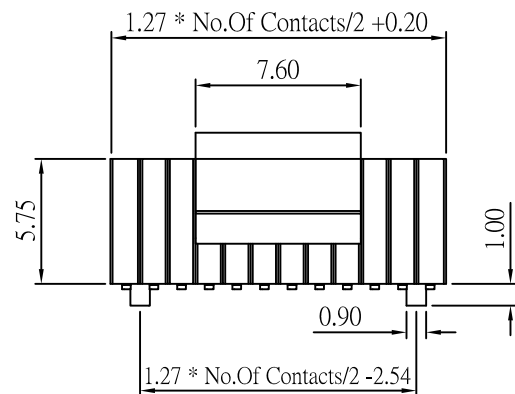
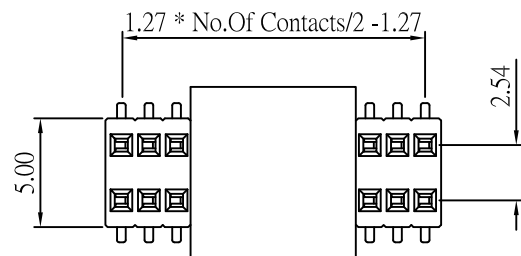


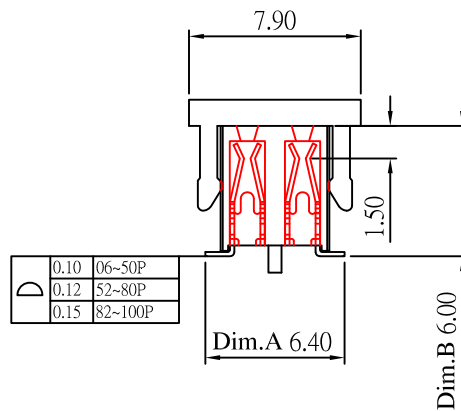


06~20 pin : 0.10 mm MAX.
22~60 pin : 0.20 mm MAX.
62~100 pin : 0.30 mm MAX.

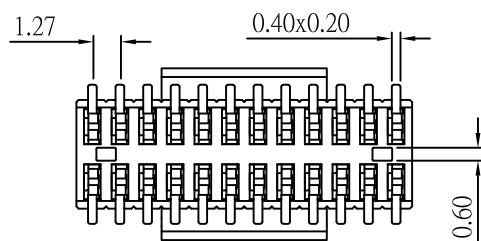

0.10	06~50P
0.12	52~80P
0.15	82~100P

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
Insulator Resistance: 5000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: 500 V AC
Operating Temperature: - 40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Plastic,UL 94V-0
Finish: Standard: Gold Flash all over

Recommended P.C. Board
SMD Layout

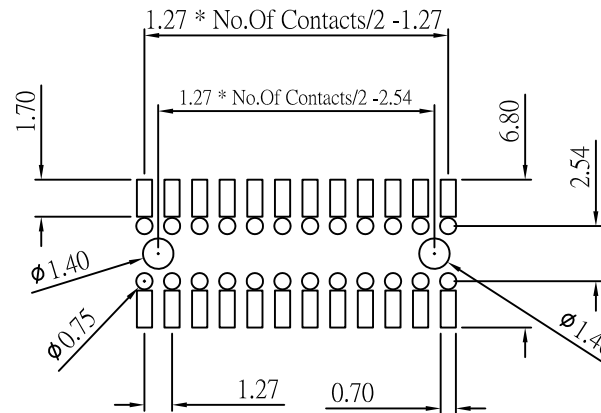

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Y-Z60PC-2Xxx-LF

SERIES
LEADFREE
2X02:04WAY
2X50:100WAY
CAP
POST
HIGH 6.0mm

BOTTOM ENTRY SMT

DESCRIPTION: