




Recommended
P.C. Board Hole Layout

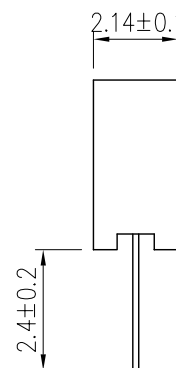

Specifications

Current Rating : 1 Amp
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 300V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Phosphor Bronze
 Insulator Material : Polyester, UL 94V-0
 Standard : Nylon-6T
 Contact Plated : See Option / Standard: Full Gold

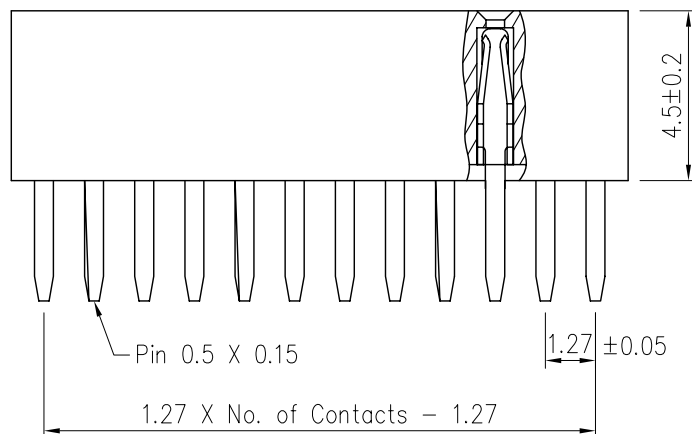

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

YA-D45-1Xxx-LF
 SERIES | LEADFREE
 1X03:03WAY
 1X50:50WAY
 HIGH 4.5mm
 DIP 180°

DESCRIPTION: Female Header P1.27mm Profile : 4.5mm, Single Row, Straight Type