

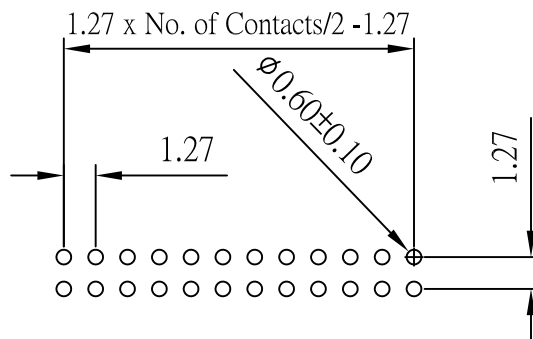


Recommended P.C. Board Hole Layout

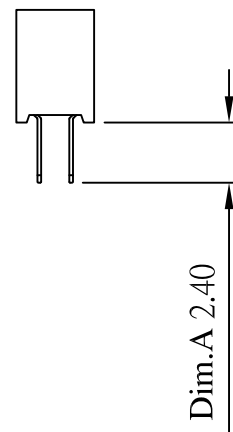

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)
 Insulator Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms max
 Dielectric Withstanding: 500 V AC
 Operating Temperature: - 40° ~ +125° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester, UL 94V-0
 Standard: LCP
 Finish: Standard: Gold Flash all over

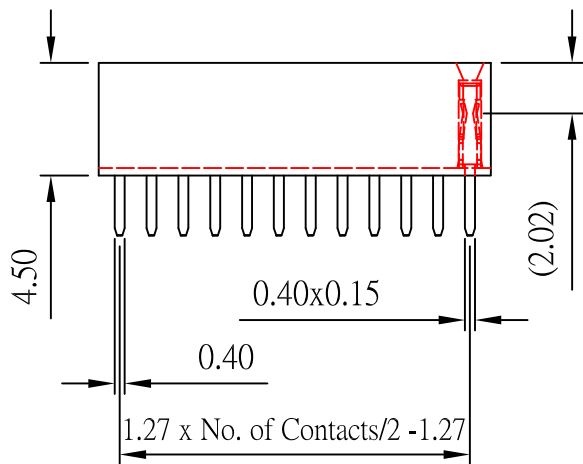

04~20 pin : 0.10 mm MAX.
 22~60 pin : 0.20 mm MAX.
 62~100 pin : 0.30 mm MAX.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

YA-D4524-2Xxx-LF
 SERIES | LEADFREE
 2X02:04WAY
 2X50:100WAY
 DIP 180° | DIP 2.4mm
 HIGH 4.50mm

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com