


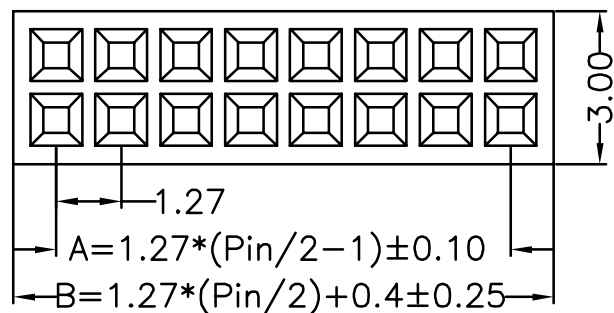

CONTACT	DIM A	DIM B	CONTACT	DIM A	DIM B
			42	25.40	27.07
04	1.27	2.94	44	26.67	28.34
06	2.54	4.21	46	27.94	29.61
08	3.81	5.48	48	29.21	30.88
10	5.08	6.75	50	30.48	32.15
12	6.35	8.02	52	31.75	33.42
14	7.62	9.29	54	33.02	34.69
16	8.89	10.56	56	34.29	35.96
18	10.16	11.83	58	35.56	37.23
20	11.43	13.10	60	36.83	38.50
22	12.70	14.37	62	38.10	39.77
24	13.97	15.64	64	39.37	41.04
26	15.24	16.91	66	40.64	42.31
28	16.51	18.18	68	41.91	43.58
30	17.78	19.45	70	43.18	44.85
32	19.05	20.72	72	44.45	46.12
34	20.32	21.99	74	45.72	47.39
36	21.59	23.26	76	46.99	48.66
38	22.86	24.53	78	48.26	49.93
40	24.13	25.80	80	49.53	51.20

Specifications:

Current rating:1.0A AC/DC

Voltage rating:50V AC/DC

Contact resistance:20m ohm min

Insulation Resistance:500M ohm max

Withstanding voltage:500V AC/minute




Temperature range:-25°C to +125°C

Material:

Insulator:High Temp.Plastic(UL94V-0)

Contact:Copper Alloy

Plating:Gold Plated

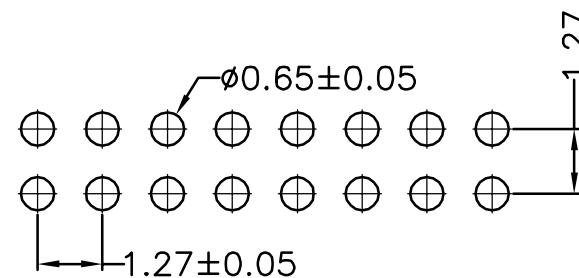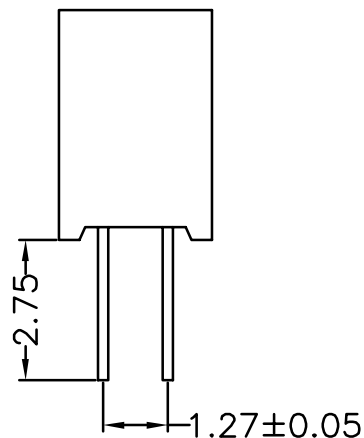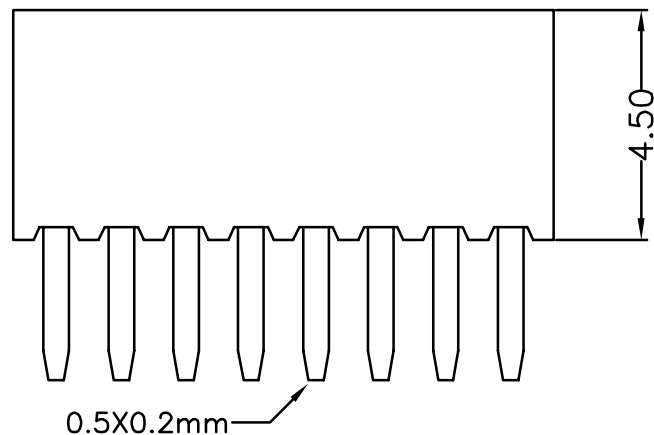

P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

YA-D4527-2Xxx-LF
SERIES LEADFREE
2X02:04WAY
2X40:80WAY
DIP 180° DIP 2.75mm
HIGH 4.5mm

DESCRIPTION: 1.27mm Double Rows Socket Dip Connector