

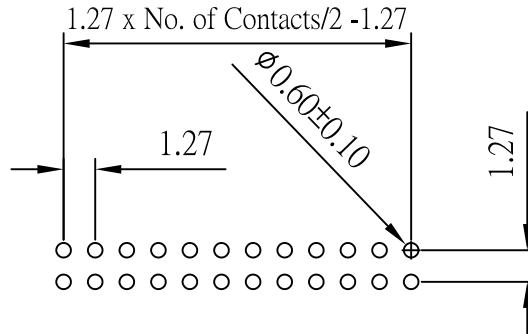


Recommended P.C. Board Hole Layout

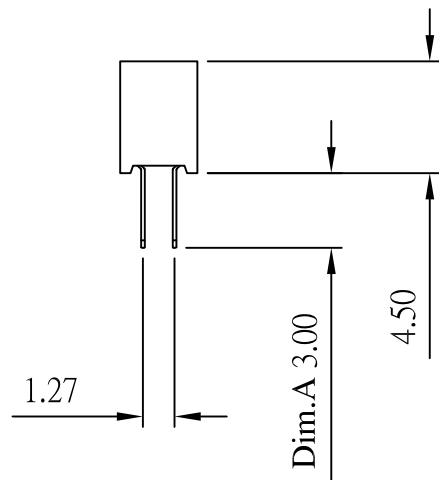

Current Rating and Voltage: 1 Amps 250V AC (r.m.s)  
 Insulator Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms max  
 Dielectric Withstanding: 500 V AC  
 Operating Temperature: - 40° ~ +125° C  
 Max Processing Temp: 230° C for 60 seconds  
 Max Processing Temp: 260° C for 10 seconds  
 Contact Material: Phosphor Bronze  
 Insulator Material: Polyester, UL 94V-0  
 Standard: LCP  
 Finish: Standard: Gold Flash all over

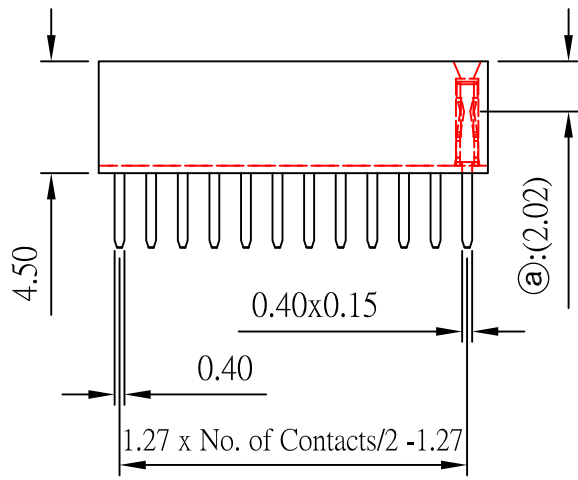

04~20 pin : 0.10 mm MAX.  
 22~60 pin : 0.20 mm MAX.  
 62~100 pin : 0.30 mm MAX.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE

X, ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ± 0.10  
 ANG ±

照片框

ORDER INFORMATION

YA-D4530-2Xxx-LF  
 SERIES | LEADFREE  
 2X02:04WAY  
 2X50:100WAY  
 DIP 180° | DIP 3.0mm  
 HIGH 4.50mm

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: