

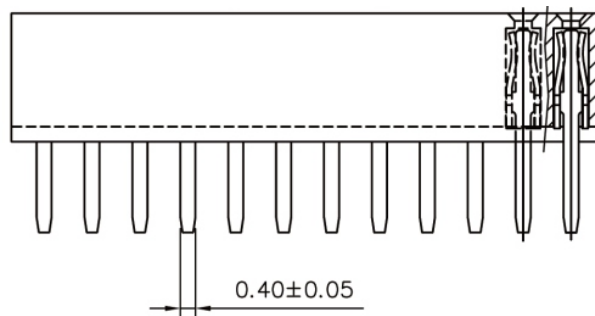


YA-Dxx-2x50	62.23	63.96
YA-Dxx-2x49	60.96	62.69
YA-Dxx-2x48	59.69	61.42
YA-Dxx-2x47	58.42	60.15
YA-Dxx-2x46	57.15	58.88
YA-Dxx-2x45	55.88	57.61
YA-Dxx-2x44	54.61	56.34
YA-Dxx-2x43	53.34	55.07
YA-Dxx-2x42	52.07	53.80
YA-Dxx-2x41	50.80	52.53
YA-Dxx-2x40	49.53	51.26
YA-Dxx-2x39	48.26	49.99
YA-Dxx-2x38	46.99	48.72
YA-Dxx-2x37	45.72	47.45
YA-Dxx-2x36	44.45	46.18
YA-Dxx-2x35	43.18	44.91
YA-Dxx-2x34	41.91	43.64
YA-Dxx-2x33	40.64	42.37
YA-Dxx-2x32	39.37	41.10
YA-Dxx-2x31	38.10	39.83
YA-Dxx-2x30	36.83	38.56
YA-Dxx-2x29	35.56	37.29
YA-Dxx-2x28	34.29	36.02
YA-Dxx-2x27	33.02	34.75
YA-Dxx-2x26	31.75	33.48
YA-Dxx-2x25	30.48	32.21
YA-Dxx-2x24	29.21	30.94
YA-Dxx-2x23	27.94	29.67
YA-Dxx-2x22	26.67	28.40
YA-Dxx-2x21	25.40	27.13
YA-Dxx-2x20	24.13	25.86
YA-Dxx-2x19	22.86	24.59
YA-Dxx-2x18	21.59	23.32
YA-Dxx-2x17	20.32	22.05
YA-Dxx-2x16	19.05	20.78
YA-Dxx-2x15	17.78	19.51
YA-Dxx-2x14	16.51	18.24
YA-Dxx-2x13	15.24	16.97
YA-Dxx-2x12	13.97	15.70
YA-Dxx-2x11	12.70	14.43
YA-Dxx-2x10	11.43	13.16
YA-Dxx-2x09	10.16	11.89
YA-Dxx-2x08	8.89	10.62
YA-Dxx-2x07	7.62	9.35
YA-Dxx-2x06	6.35	8.08
YA-Dxx-2x05	5.08	6.81
YA-Dxx-2x04	3.81	5.54
YA-Dxx-2x03	2.54	4.27
P/N	A	B

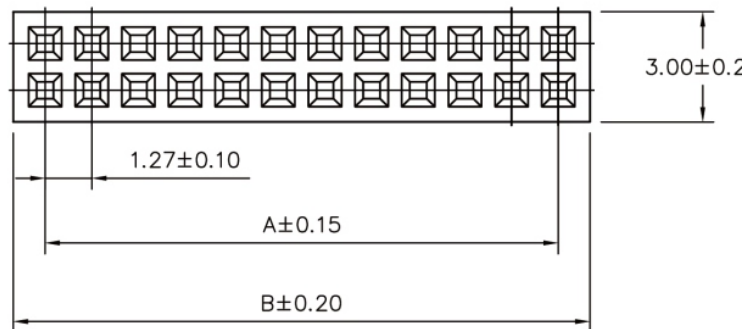


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. INSERTION FORCE: 120gf MAX. PER CONTACT.
2. WITHDRAW FORCE: 20gf MIN. PER CONTACT.
3. DURABILITY: 100 CYCLES MIN..
4. CONTACT RETENTION FORCE: 200gf MIN. PER CONTACT.
5. CURRENT RATING: 1 AMPERE.
6. CONTACT RESISTANCE: 20 m ohms MAX. FOR INITIAL.
7. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC rms. PER ONE MINUTE.
8. INSULATION RESISTANCE: 5000 M ohms MIN..

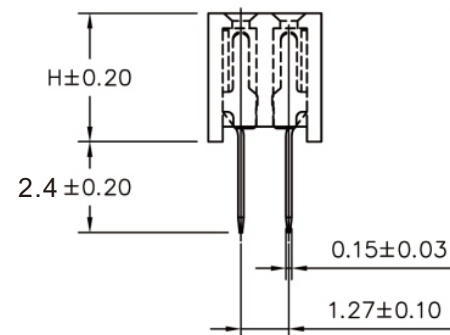

Recommended P.C.Board Hole Layout

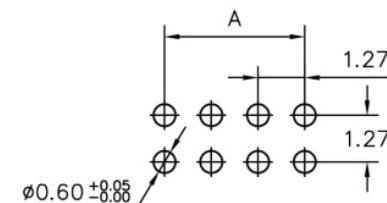

Height:
H:3.4mm
4.3mm

YA-Dxx-2Xxx-LF
34:3.4mm LEADFREE
43:4.3mm 2X03:06WAY
2X50:100WAY

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. YA-Dxx-2Xxx

DWG NO. YA-Dxx-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X.±
.X±
.XX±
.XXX±
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司