
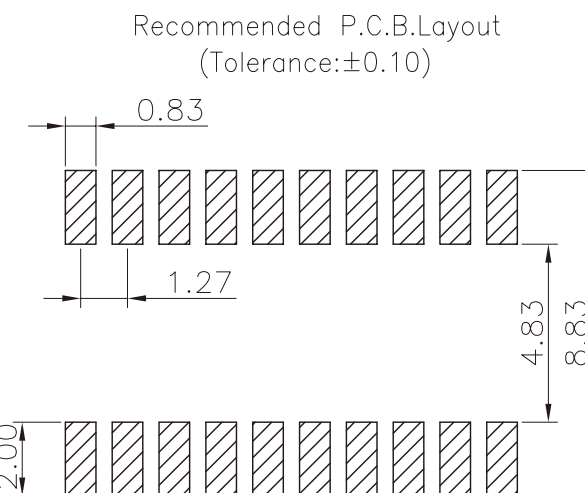
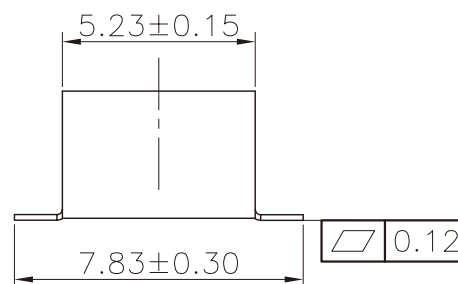


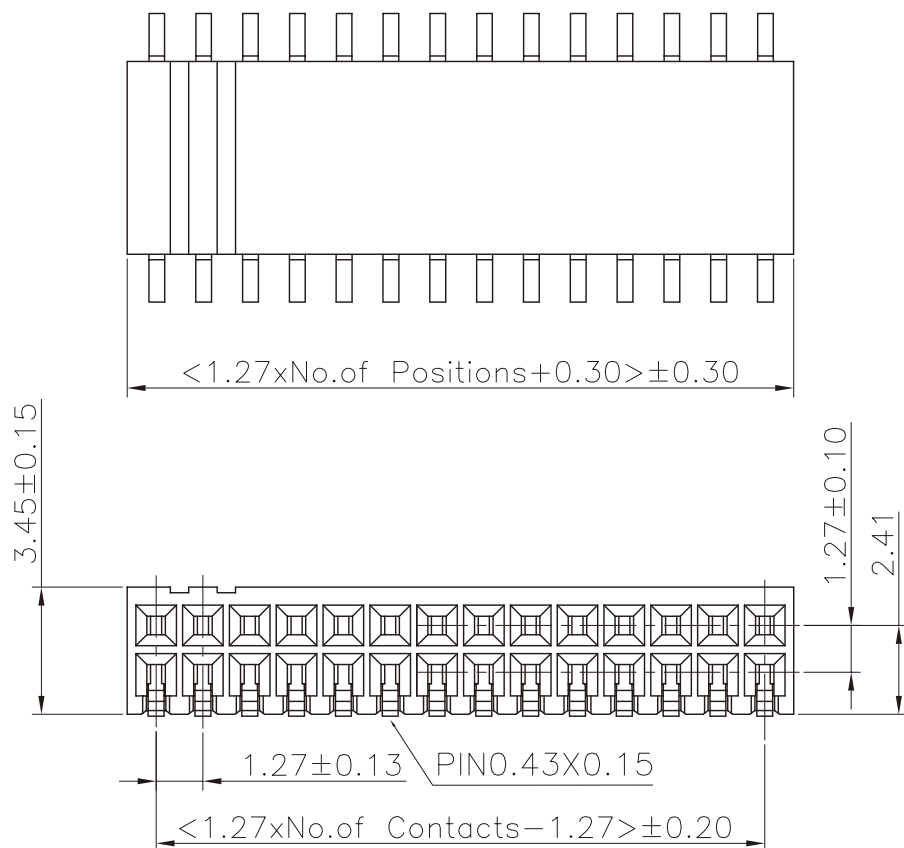

Specifications

Current Rating: 1.0Amp

Insulation Resistance: $1000\text{M}\Omega$ Min.

Dielectric Withstanding: 300V AC

Contact Resistance: $20\text{m}\Omega$ Max.

Operating Temperature: -40°C to $+105^\circ\text{C}$

Materials

Contact Material: Phosphor Bronze

Insulator Material: Polyester UL94V-0

△ LCP

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30


.X. ± 0.25

.XX. ± 0.15

.XXX. ± 0.10


ANG $\pm$

P PROJECTION



ORDER INFORMATION

YA-MX-2Xxx-LF

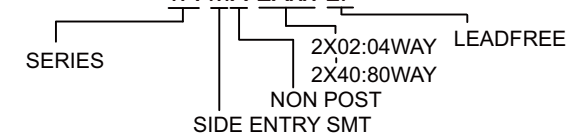

DESCRIPTION: 1.27 FEMALE HEADER DUAL ROWS SMT TYPE BASE 3.45H