
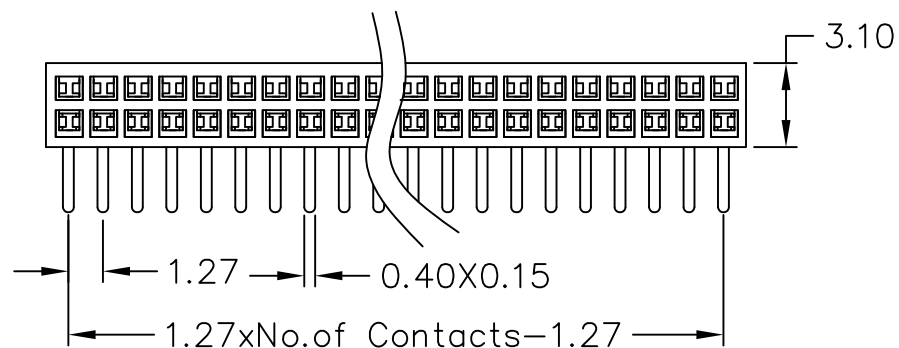
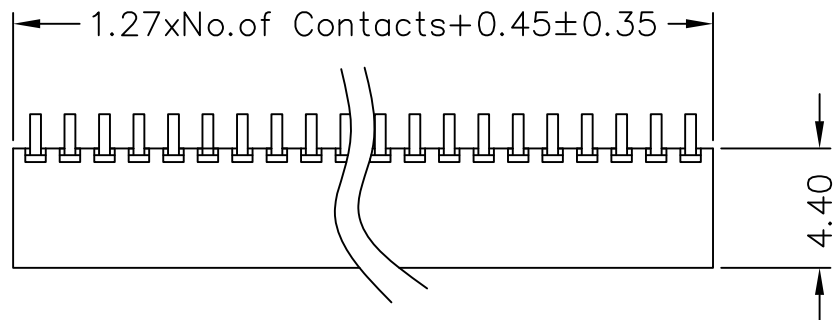


Recommended p.c. Board SMD Layout

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20m ohms max
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40°C~+85°C
 Max processing Temp: 230°C for 60 seconds
 260°C for 10 seconds
 Contact Material: Phosphor Bronze
 Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T
 Finish: Tin,Gold plated
 Standard:Gold Flash all over

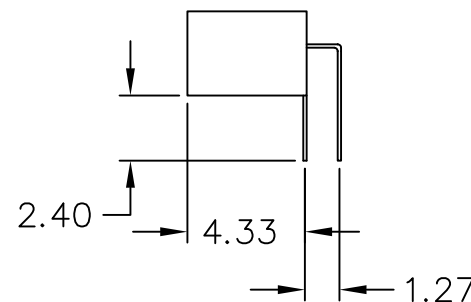

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

照片框

ORDER INFORMATION

YA-R44-2Xxx-LF
 SERIES LEADFREE
 2X02:04WAY
 2X50:100WAY
 HIGH 4.4mm
 DIP 90°

DESCRIPTION:FEMALE HEADER 1.27*1.27mm STRAIGHT TYPE, DUAL ROWS HEIGHT 4.4mm