
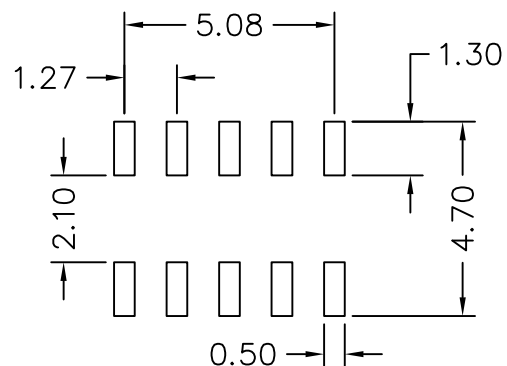
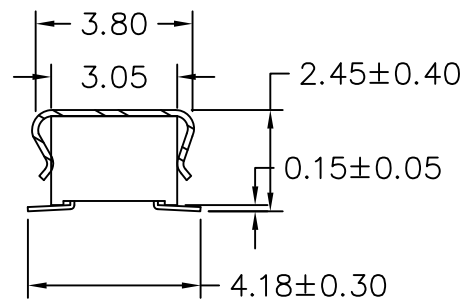


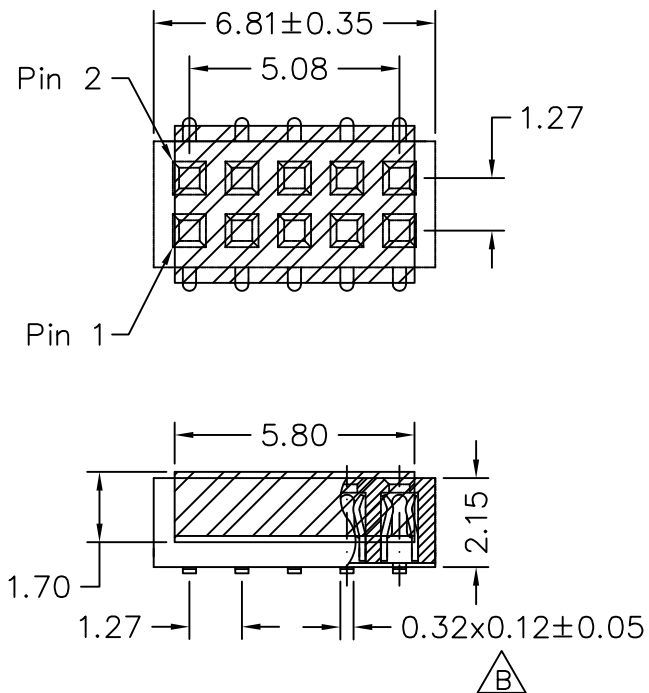

Recommended P.C.B Layout

MATERIAL

Insulator : NY6T

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

YA-V23XC-2X05-LF
SERIES | CAP | 10 WAY | LEADFREE
NON POST
HIGH 2.3mm
180°SMT

DESCRIPTION: FEMALE HEADER 1.27*1.27mm SMT TYPE, TOP ENTRY HEIGHT 2.15mm, CAP+TUBE