
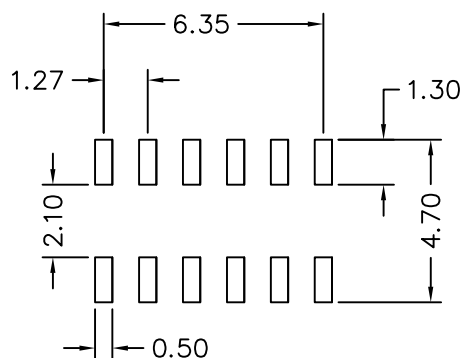
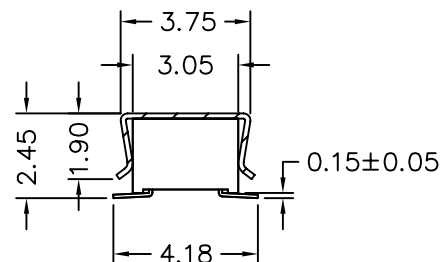
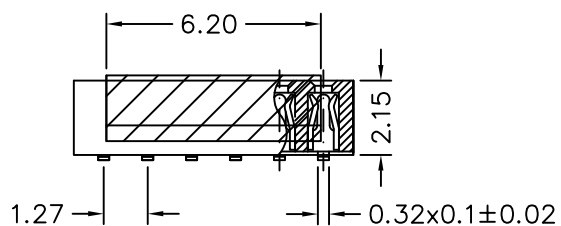


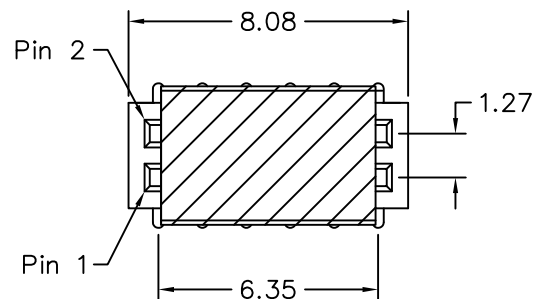

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin.

Contact Resistance : 20mΩMax.

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

YA-V23XC-2X06-LF
 SERIES CAP 12 WAY LEADFREE
 NON POST
 HIGH 2.3mm
 180°SMT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

DESCRIPTION: FEMALE HEADER 1.27*1.27mm SMT TYPE, TOP ENTRY HEIGHT 2.15mm CAP+TAPE REEL