
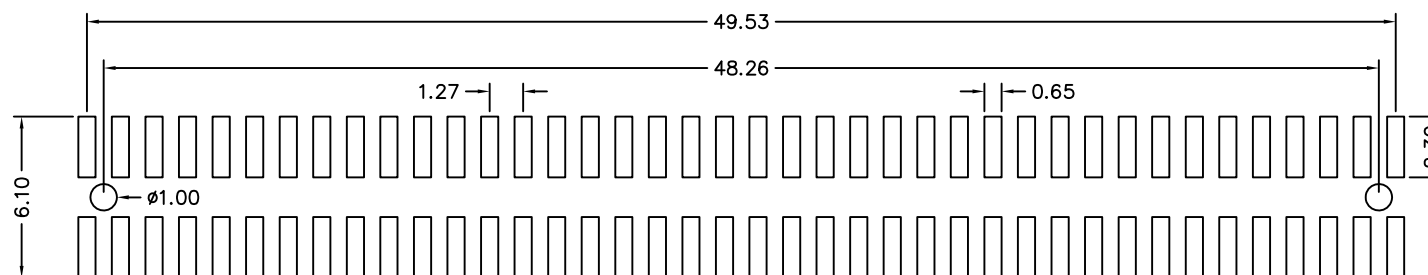



Current rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300VΩ AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0

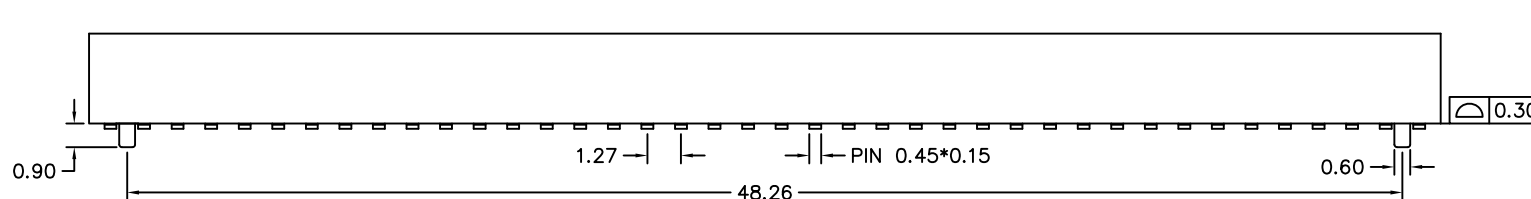

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

YA-V36P-2X40-LF
 SERIES POST 80 WAY LEADFREE
 HIGH 3.6mm
 180°SMT

DESCRIPTION: FEMALE HEADER 1.27*1.27mm
 SMT TYPE, TOP ENTRY HEIGHT 3.4mm