

Recommended P.C.B Layout

MATERIAL

Contact Pin : Phosphor Bronze
 Insulator: NY9T UL94-V0

SPECIFICATION

Current Rate : 8 AMP PER PIN(20AWG)
 Insulation Resistance : 5000MΩMin.
 Contact Resistance : 20mΩMax.
 Dielectric Voltage : AC 500V for one minute
 Operating Temperature: -40°C to +105°C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE


SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°

PJECTION

照片框

ORDER INFORMATION

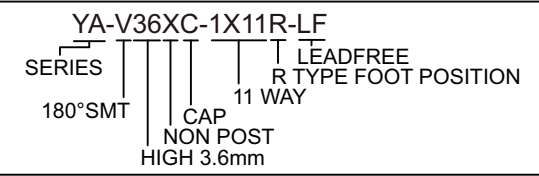

DESCRIPTION: FEMALE HEADER 1.27*1.27mm SMT TYPE, TOP ENTRY HEIGHT 3.4mm ,CAP