
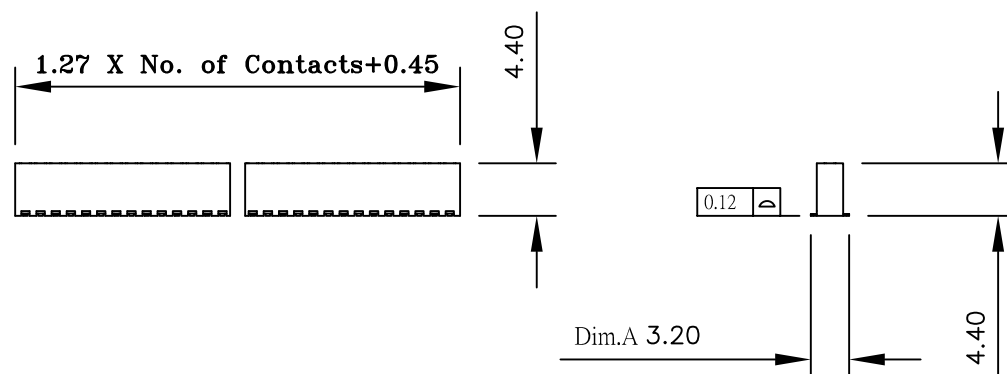

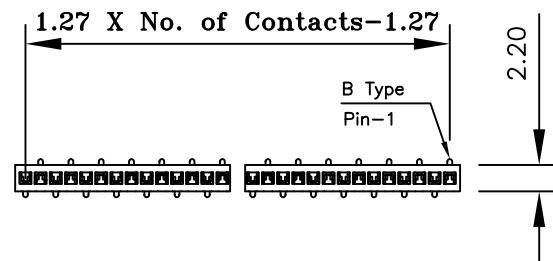


Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: AC 500 V
 Operating Temperature: - 40° ~ +85° C
 Max Processing Temp: 230° C for 60 seconds
 Max Processing Temp: 260° C for 10 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polyester,UL 94V-0
 Standard: Nylon-6T

Finish: Tin,Gold Plated
 Standard:Gold Flash all over

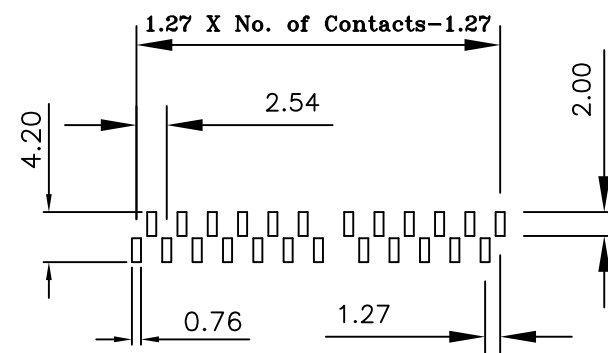

Recommended P.C. Board
 SMD Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

YA-V44X-1XxxL-LF

SERIES
 180°SMT
 HIGH 4.4mm

LEADFREE
 L TYPE FOOT POSITION
 1X03:03WAY
 1X40:40WAY
 NON POST

DESCRIPTION: